

Formulate 20'x 20' Island Exhibit - Kit 08

CFAB-K-08

Formulate® Fusion provides an unparalleled dynamic that elevates and accentuates a message and brand, but also maximizes the return on trade show investment. Formulate Fusion is Origin's collection of 20ft x 20ft exhibit kits and custom solutions. A fusion of FORM, FABRIC and FUNCTION, these kits combine organic and architectural shapes with state-of-the-art zipper pillowcase dye-sublimated fabric graphics to create unique, dynamic and functional island space.



features and benefits:

- 30mm and 50mm aluminum tube frames
- 12 back-lit dye-sublimated silicone edge push-fit fabric graphics
- Counter tops available in four thermoformed finishes, shown below
- Kit includes multi layered frames, dye-sublimated pillowcase graphics, six LED light boxes, a conference room and one counter
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit:

239.7" w x 190.1" h x 239.9" d
6087mm(w) x 4828mm(h) x 6093mm(d)

Approximate weight with cases:

1549 lbs / 702.6 kgs

Shipping

Packing case(s):

1 WOODCRATE-H Case
2 OCE-2 Cases

Shipping dimensions:

WOODCRATE-H: 101"l x 53" w x 49" h
2566mm(l) x 1347mm(w) x 1245mm(h)

OCE-2: Expandable case length (l) may vary

40" - 66"l x 18" w x 18" h
1016mm-1677mm(l) x 458mm(w) x 458mm(h)

Approximate total shipping weight (includes cases & graphics):

1583.8 lbs / 718.4kgs

Graphic

Refer to related graphic template for more information.

Visit:

www.exhibitors-handbook.com/graphic-templates

additional information:

Graphic material:
dye-sublimation zipper pillowcase fabric

*Monitors and flooring not included

Counter top Dimensions:

47" w x 1.18" h x 23" d
Counter top Max Weight Capacity: 25 lbs.

Wood Finish Options



silver

black

mahogany

natural

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Included In Your Kit

Tools, Components, & Connectors



ALLEN KEY SET x2



CFAB-K-08-A-P1 x4



ES50 x102




ES30 x34




LIGHT-FLL440 x12



LIGHT-FL3LC6 LINK CABLE x10

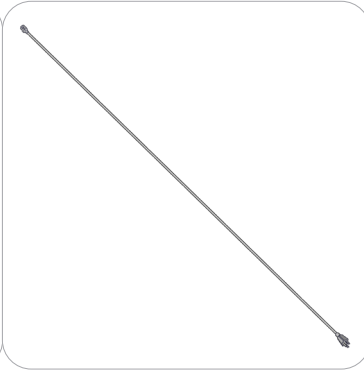

LIGHT-FL3PC6 POWER CORD x2

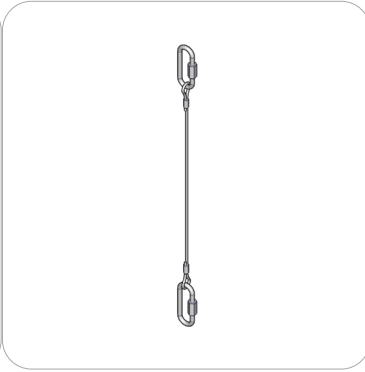

CH-ID-LD-01 x2



EYEBOLT-5/16-18 x2



LN114-SCRW x4




BASE-CFAB-K-08-D-1 x2



BASE-CFAB-K-08-D-2 x2



BASE-CFAB-K-08-D-3 x4

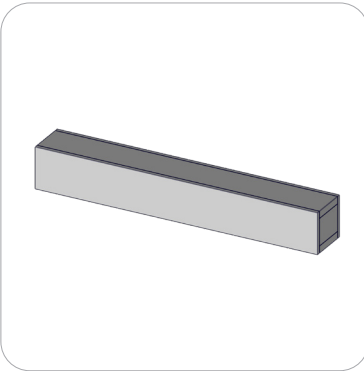


BASE-CFAB-K-08-D-4 x2

Included In Your Kit


Tools, Components, & Connectors




PHFC4-750-GR-MCB9-MCB9-SIDE x12

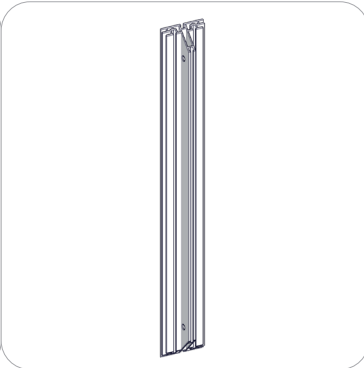


PHFC4-750-MCB9-MCB9 x12

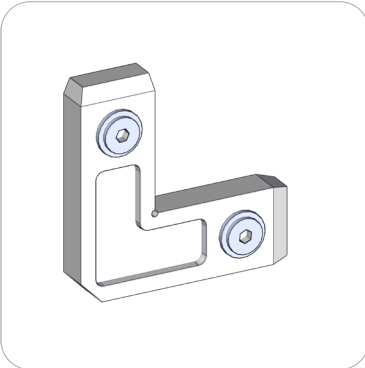


CB9 x24

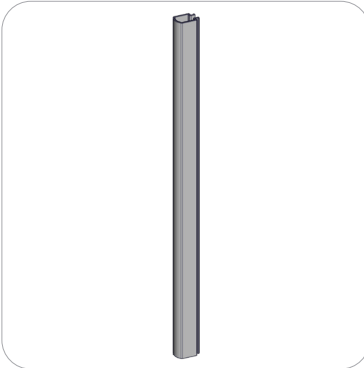


WME-300 x12

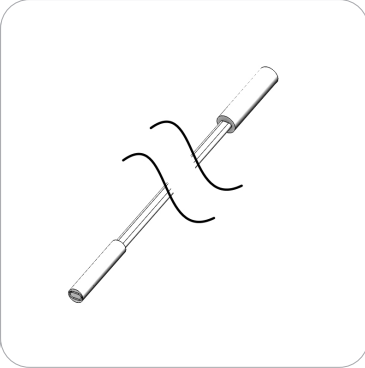


LED-DB-PWRSUPLY-2-CL-800 x2

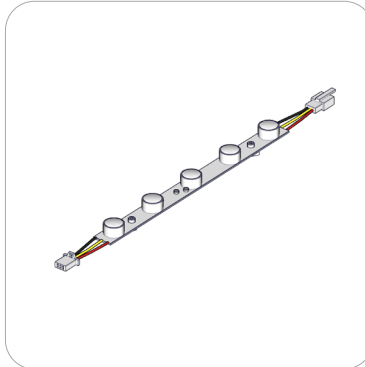


LED-WHT-DB-300 x24

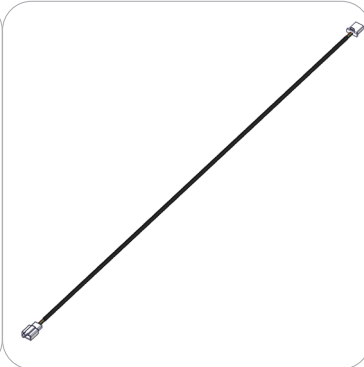


LED-DB-CL-300 x12

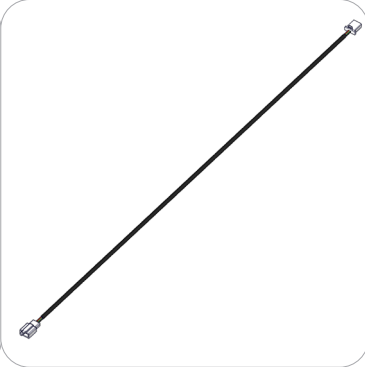

LED-DB-CL-800 x12

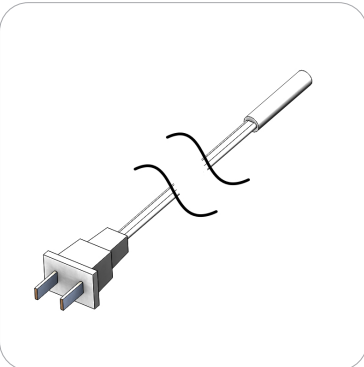


LED-DB-PWRCORD-2 x2

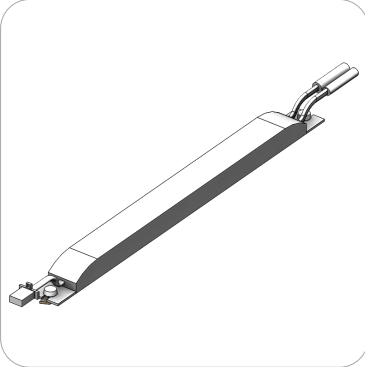

LED-DB-PWRSUPLY-2 x2


Graphics

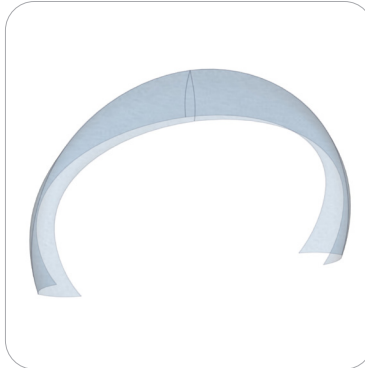

CFAB-K-08-A-G-1 x1




CFAB-K-08-A-G-2 x2
CFAB-K-08-A DIFFUSER PANEL x4

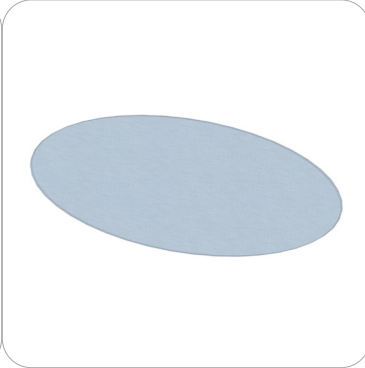

CFAB-K-08-B-G-1 x2




CFAB-K-08-C-G-1 x1

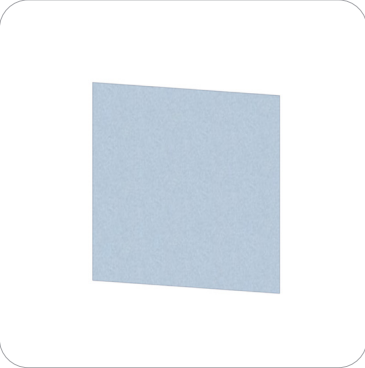

CFAB-K-08-D-G-1 x12

Included In Your Kit

Tubes

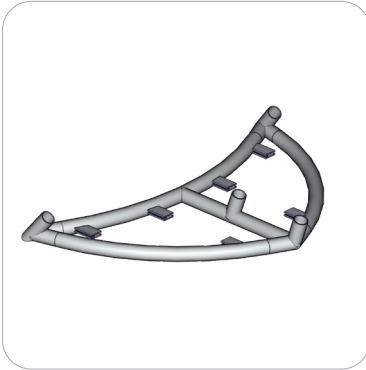

CFAB-K-08-A-T1 x2



CFAB-K-08-A-T2 x2



CFAB-K-08-A-T3 x2



CFAB-K-08-A-T4 x2



CFAB-K-08-A-T5 x2



CFAB-K-08-A-T6 x2



CFAB-K-08-A-T7 x2




CFAB-K-08-A-T8 x2



CFAB-K-08-A-T9 x2




CFAB-K-08-A-T10 x2

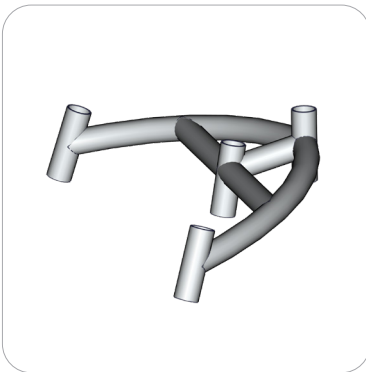


CFAB-K-08-A-T11 x2




CFAB-K-08-A-T12 x2

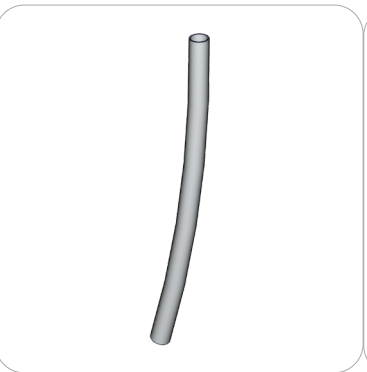

CFAB-K-08-A-T13 x2

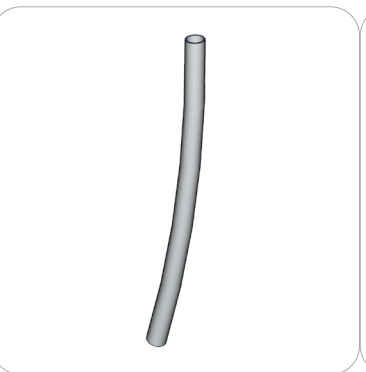


CFAB-K-08-A-T14 x2

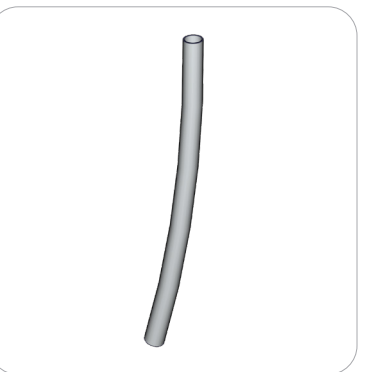

CFAB-K-08-A-T15 x2

Included In Your Kit

Tubes

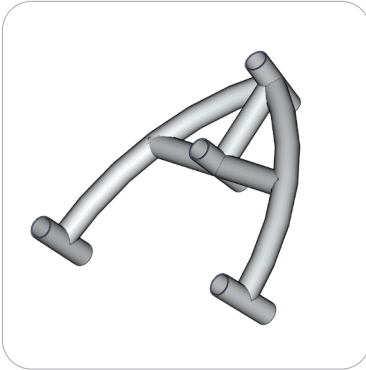


CFAB-K-08-A-T16 x2



CFAB-K-08-A-T17 x2




CFAB-K-08-A-T18 x2

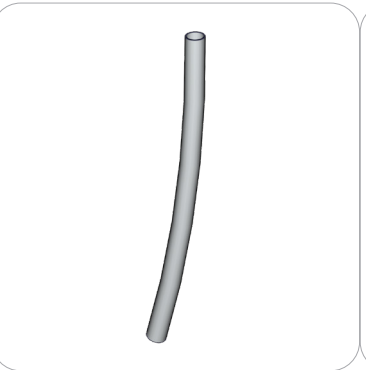

CFAB-K-08-A-T19 x2



CFAB-K-08-A-T20 x2

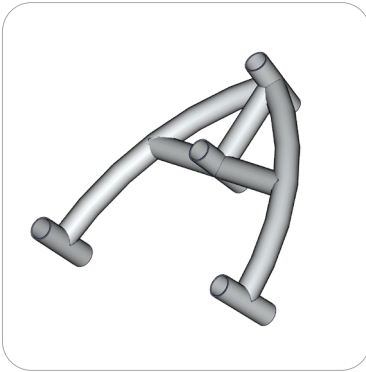


CFAB-K-08-A-T21 x2



CFAB-K-08-A-T22 x2



CFAB-K-08-A-T23 x2

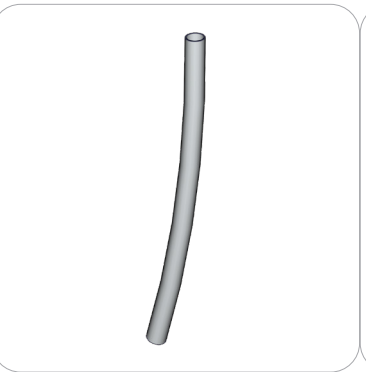


CFAB-K-08-A-T24 x2




CFAB-K-08-A-T25 x2




CFAB-K-08-A-T26 x2

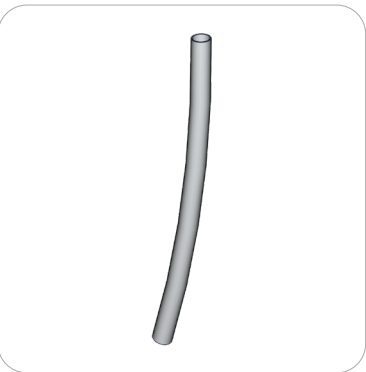


CFAB-K-08-A-T27 x2

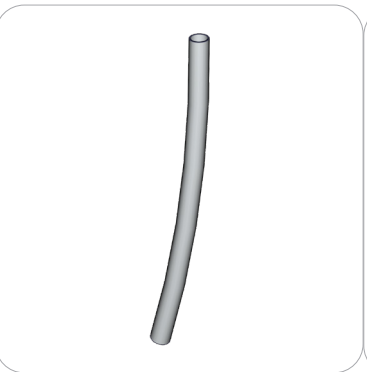

CFAB-K-08-A-T28 x2

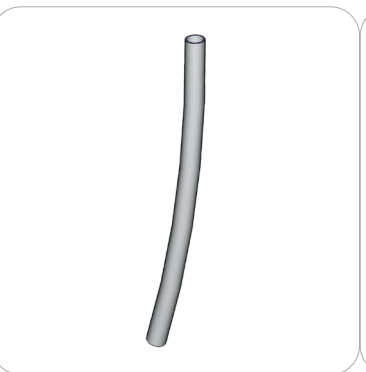


CFAB-K-08-A-T29 x2

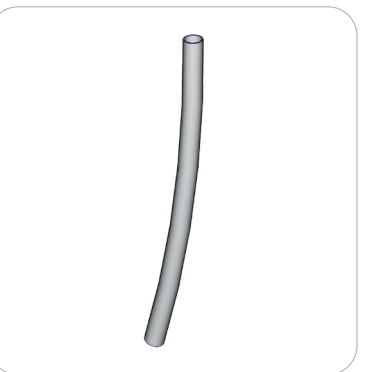


CFAB-K-08-A-T30 x2

Included In Your Kit

Tubes

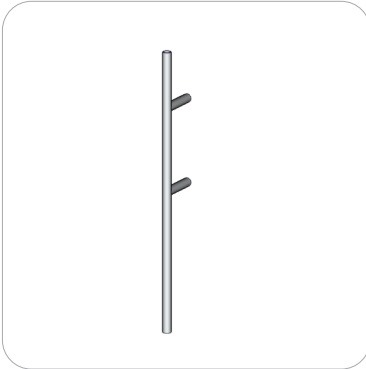


CFAB-K-08-B-T1 x2

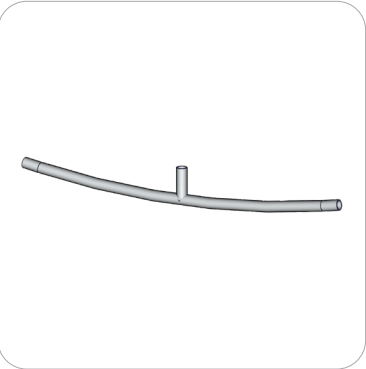


CFAB-K-08-B-T2 x4



CFAB-K-08-B-T3 x8

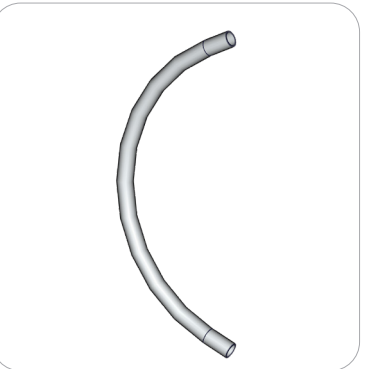

CFAB-K-08-B-T4 x4

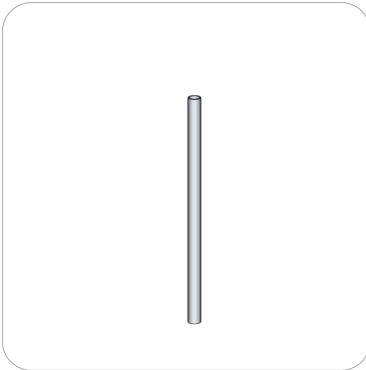


CFAB-K-08-C-T1 x2




CFAB-K-08-C-T2 x2




CFAB-K-08-C-T3 x4

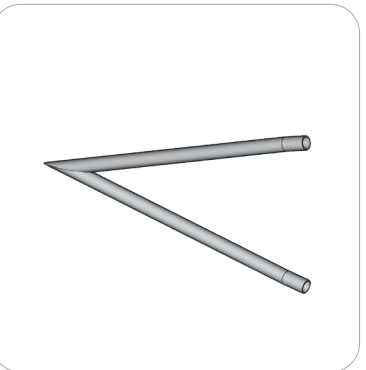

CFAB-K-08-C-T4 x2

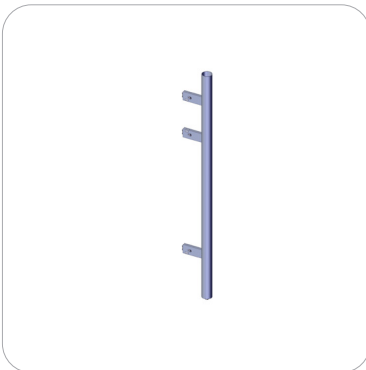

CFAB-K-08-D-T1 x2

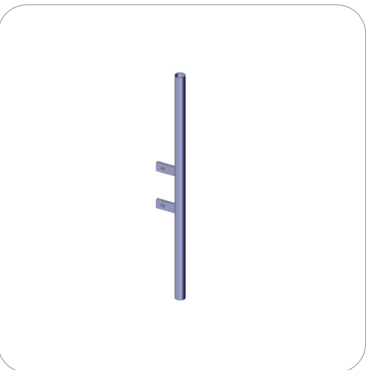

CFAB-K-08-D-T2 x2




CFAB-K-08-D-T3 x2




CFAB-K-08-A-T31 x1

Included In Your Kit

Tubes

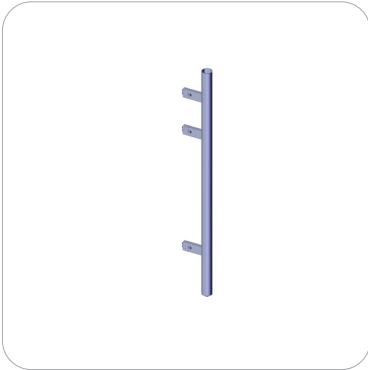

CFAB-K-08-D-T1 x2

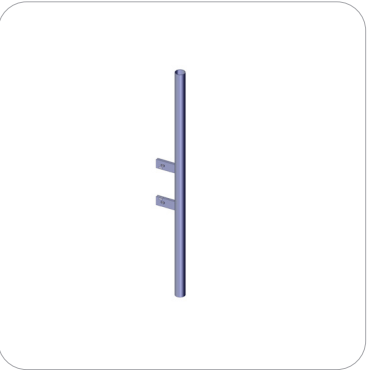

CFAB-K-08-D-T2 x2

Additional Kits





C-WALL-02 x1



W-05-C x1



Exploded View

CFAB-K-08

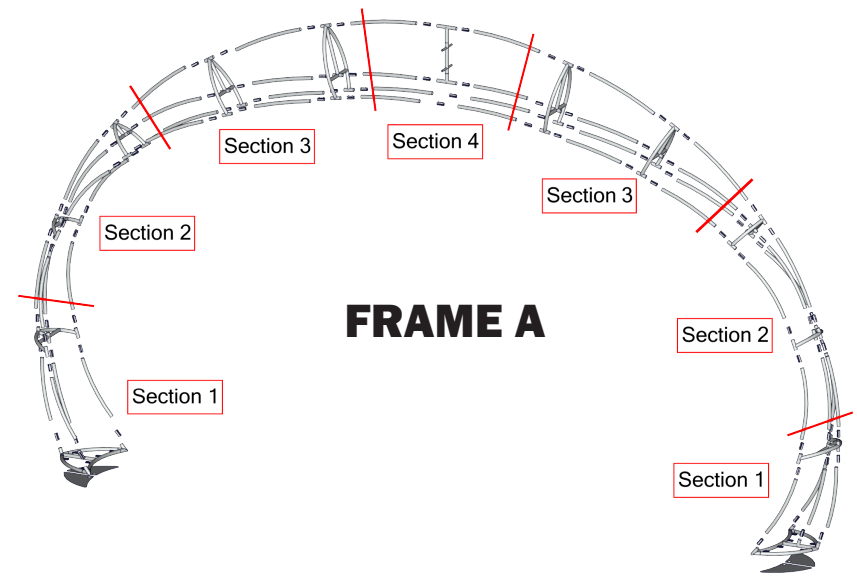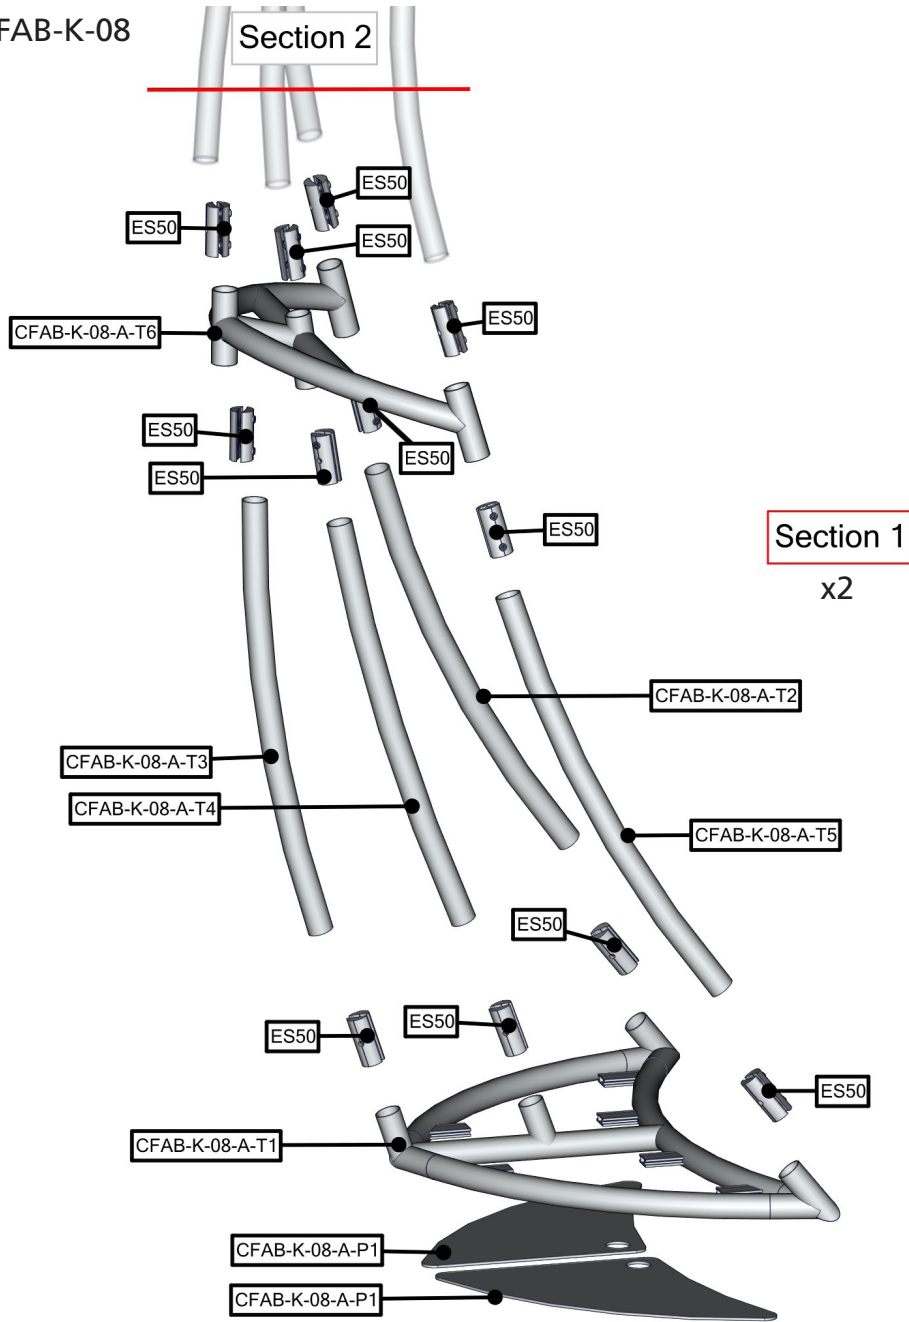



Exploded View

CFAB-K-08

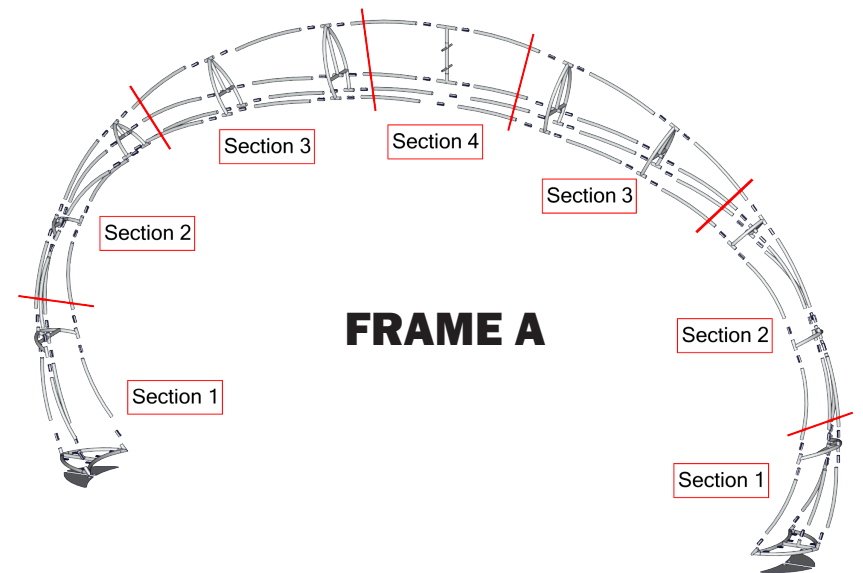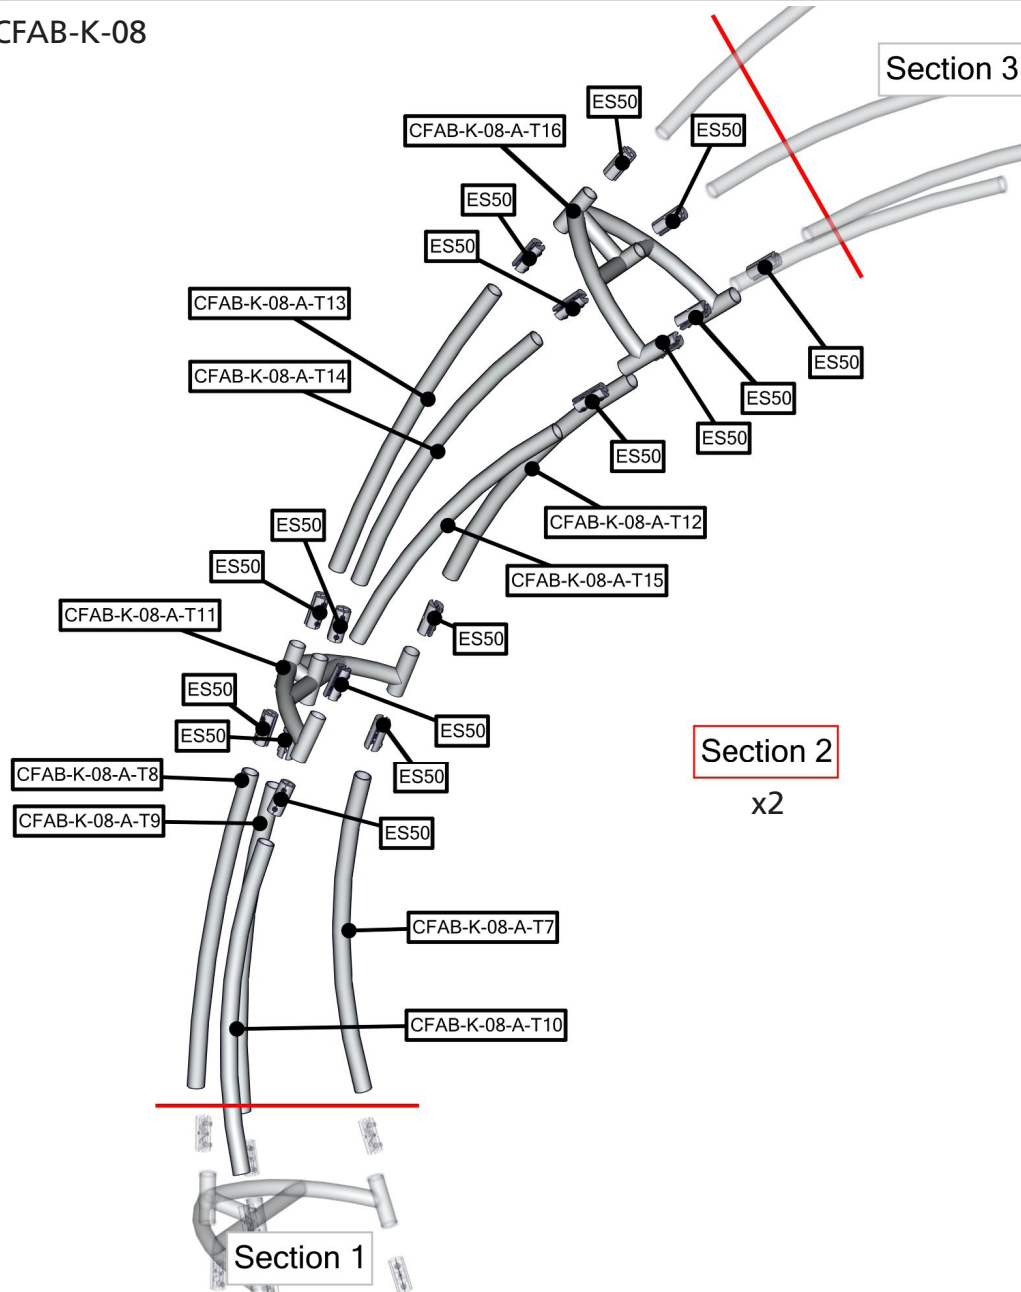


Exploded View

CFAB-K-08

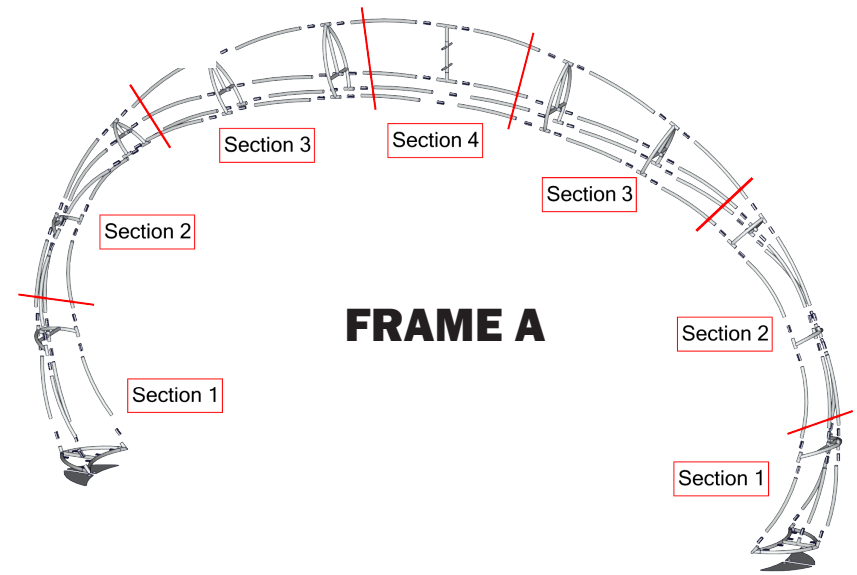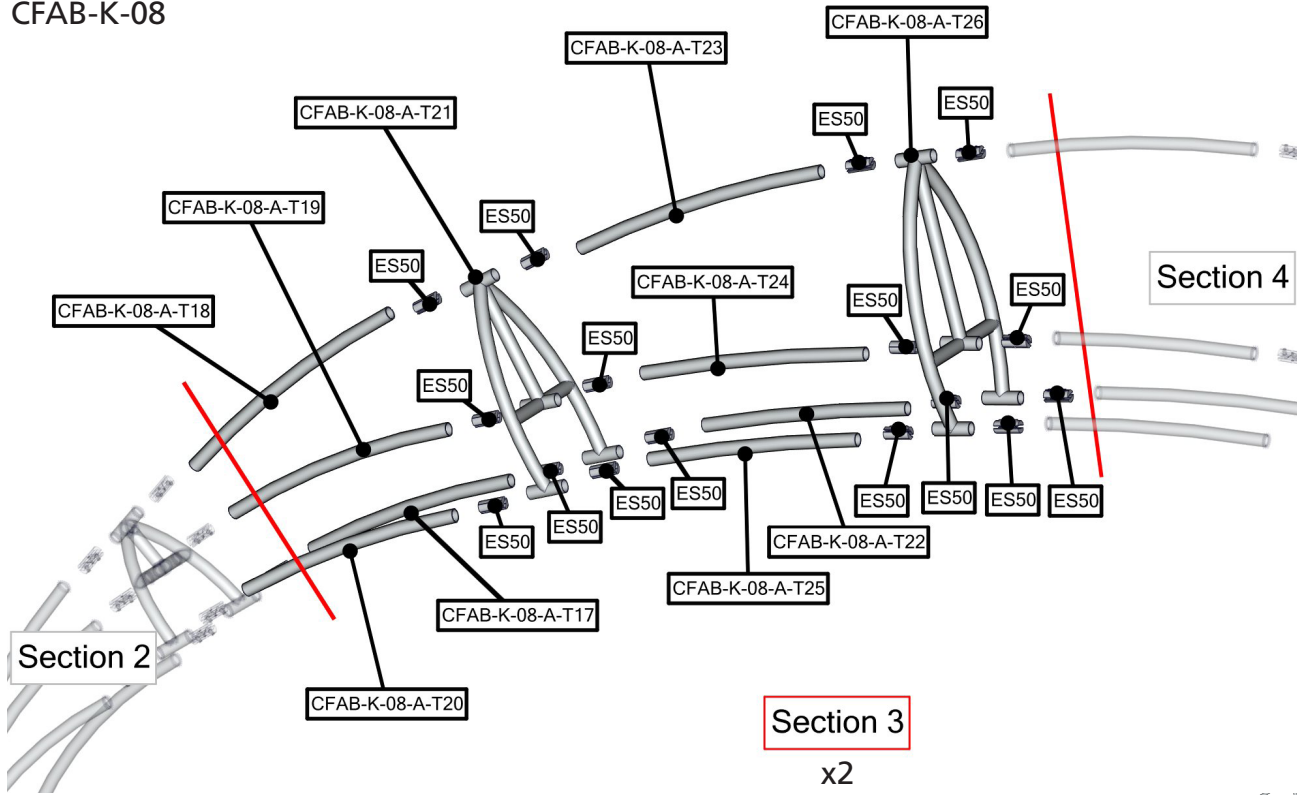


Exploded View

CFAB-K-08

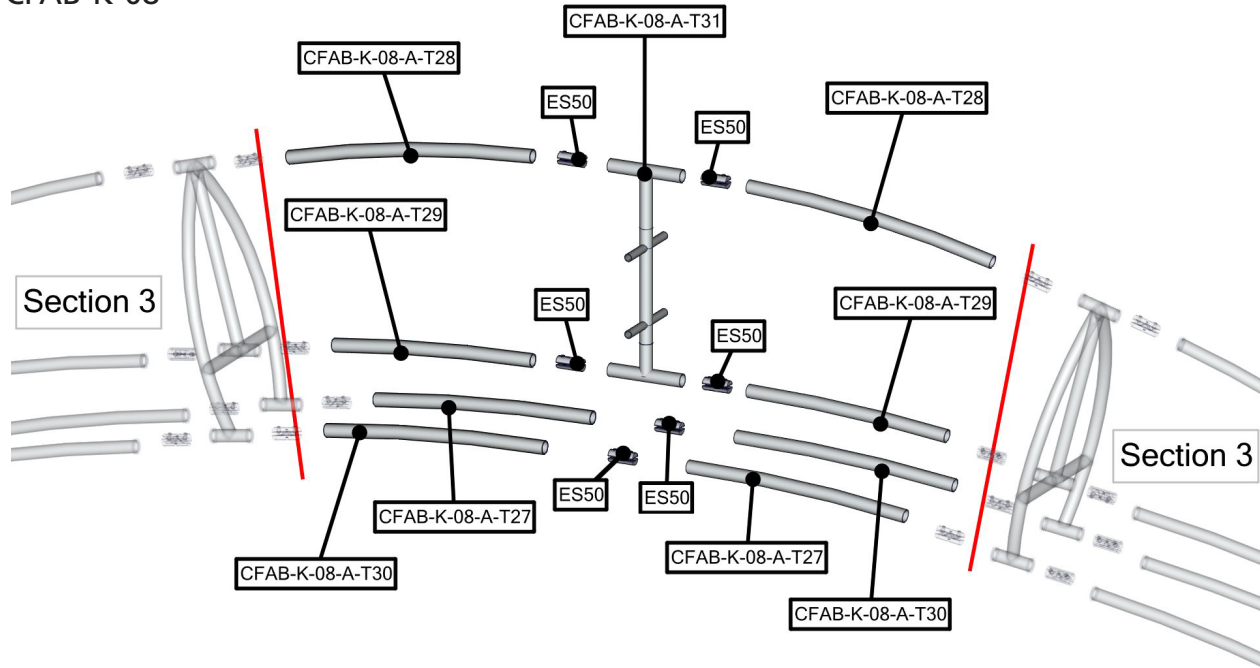





Section 4

x1

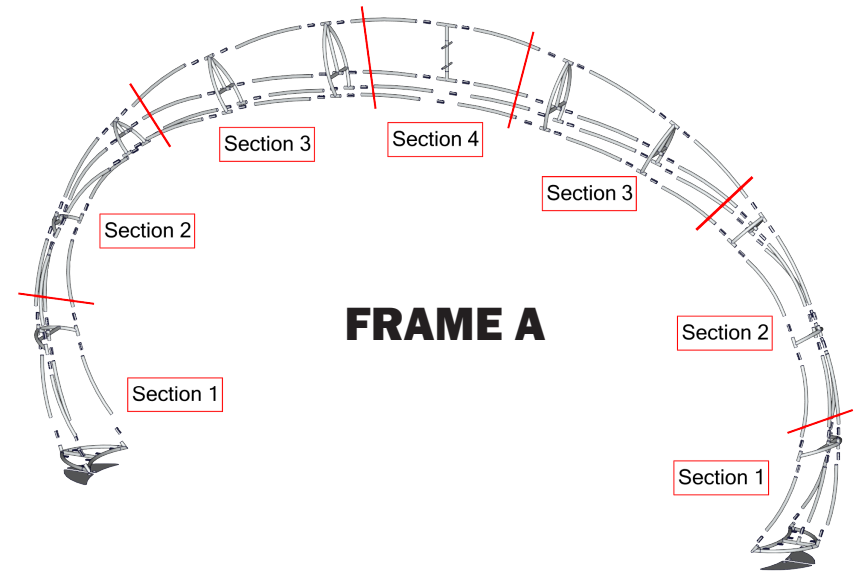


Labeling Diagram

CFAB-K-08

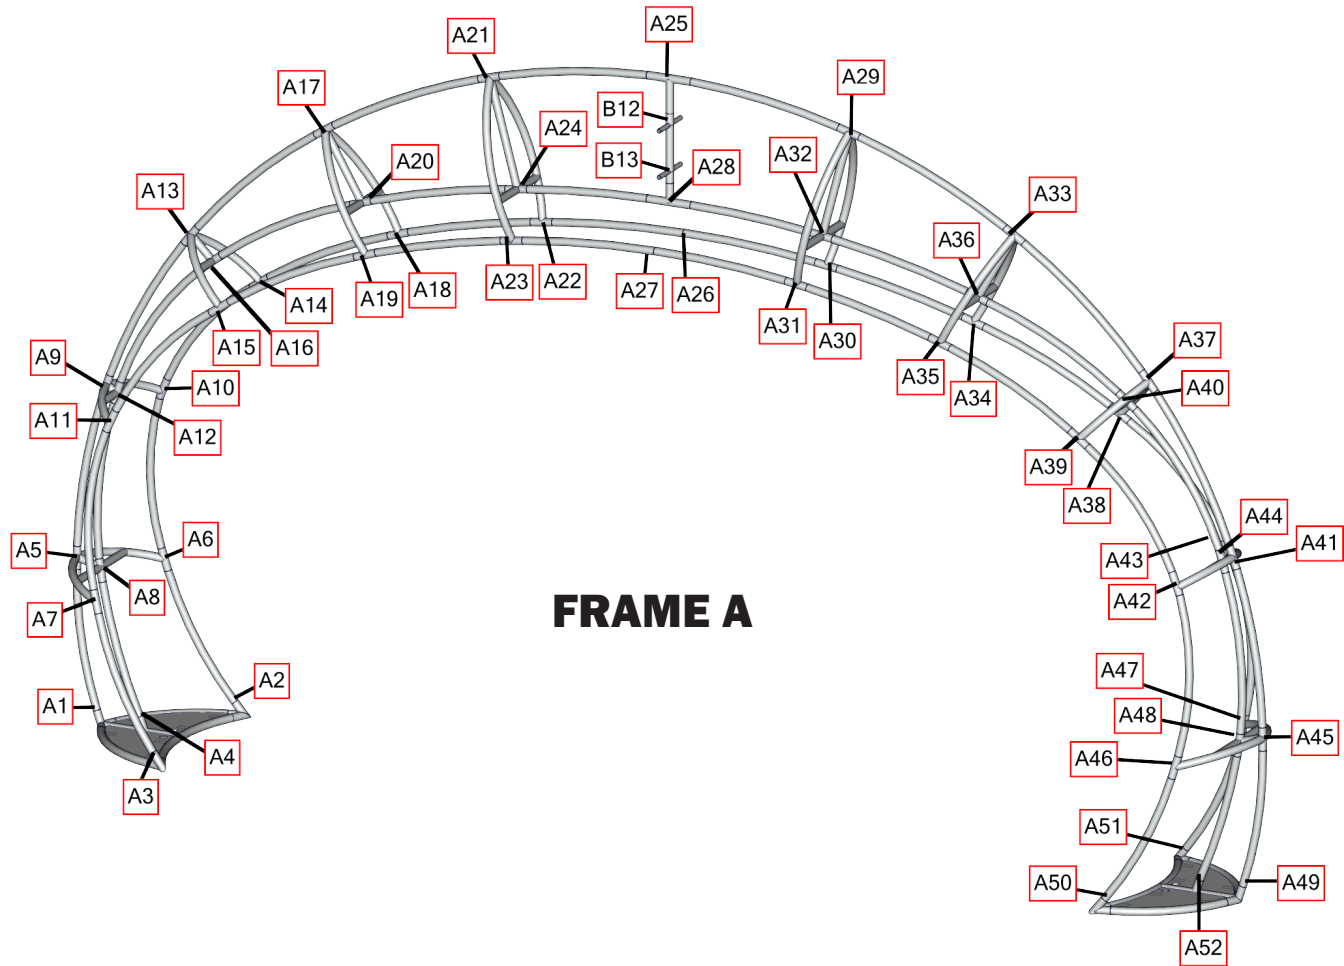

Internal Lighting Setup

CFAB-K-08

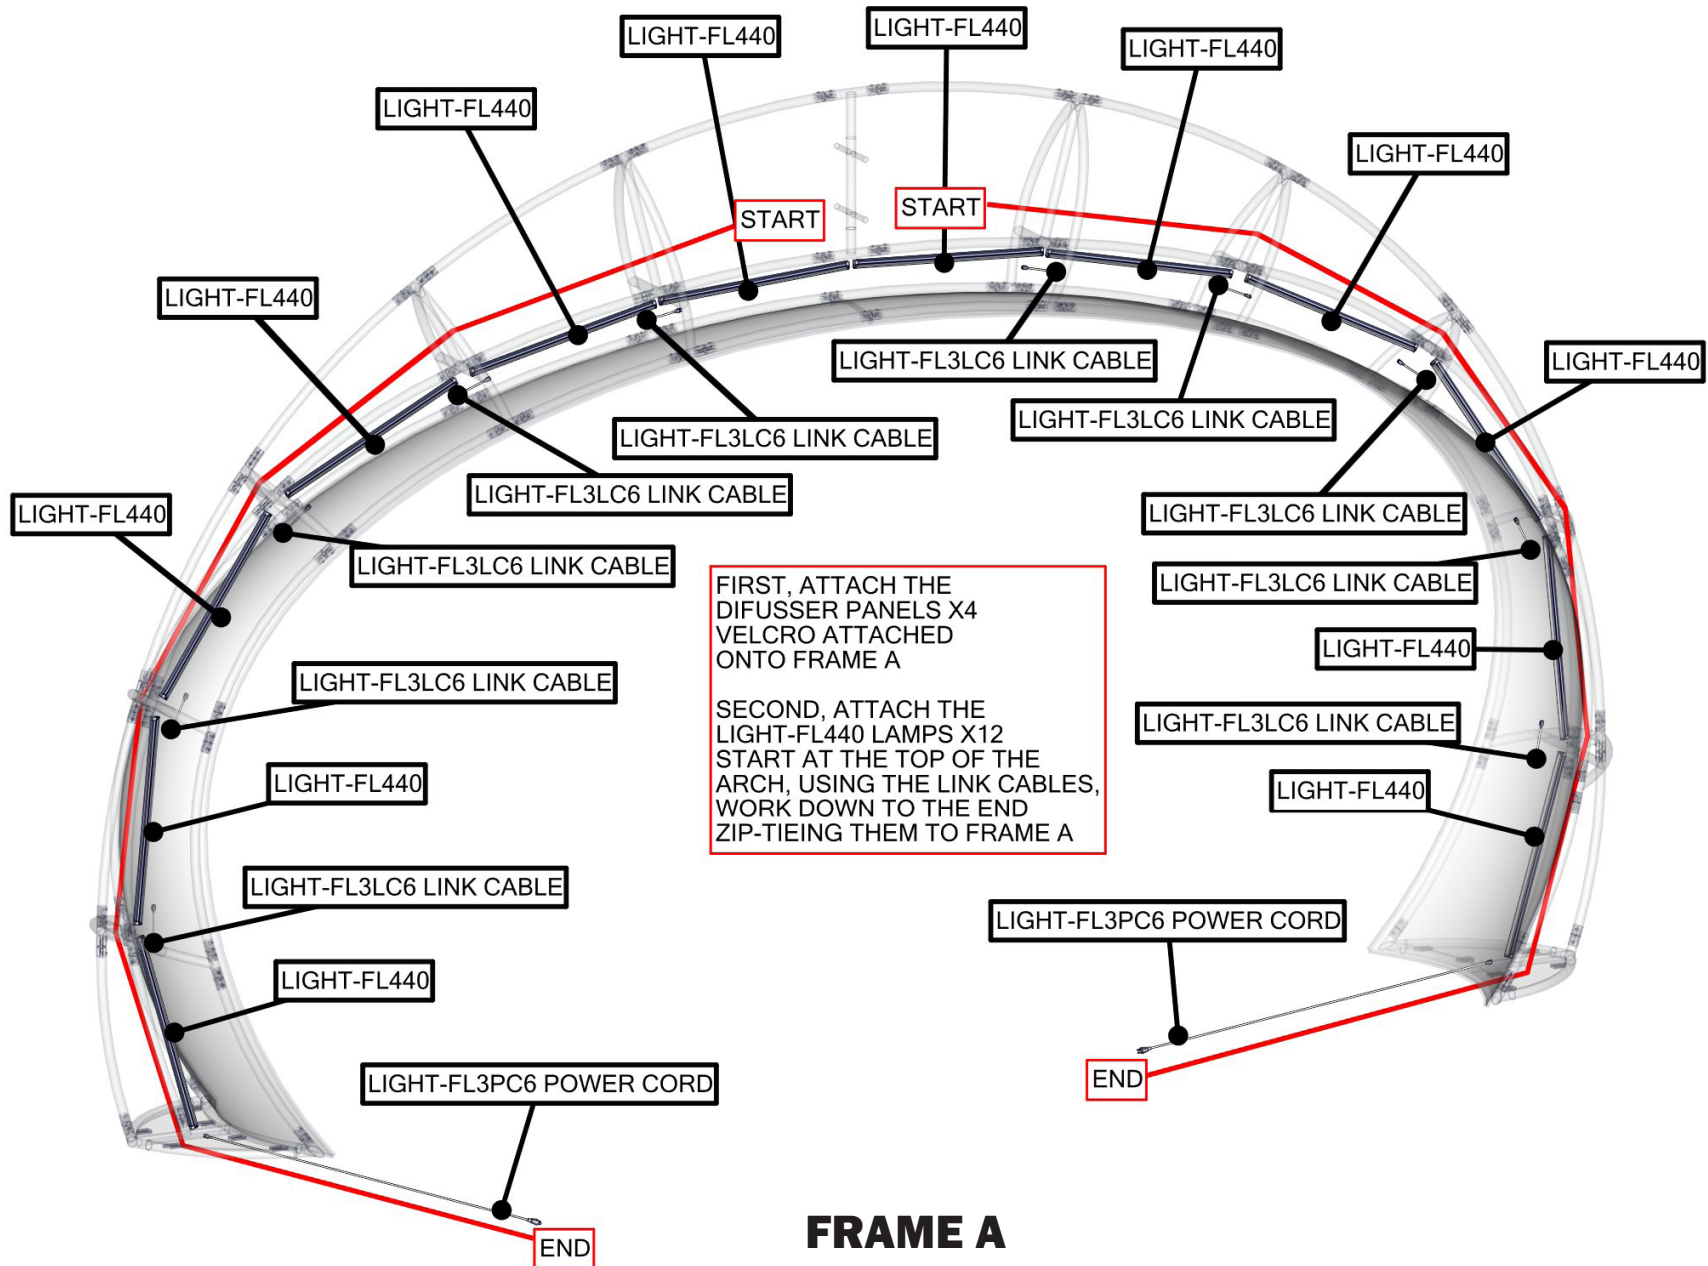


FIRST, ATTACH THE DIFUSSER PANELS X4 VELCRO ATTACHED ONTO FRAME A

SECOND, ATTACH THE LIGHT-FL440 LAMPS X12 START AT THE TOP OF THE ARCH, USING THE LINK CABLES, WORK DOWN TO THE END ZIP-TIING THEM TO FRAME A


Exploded View

CFAB-K-08

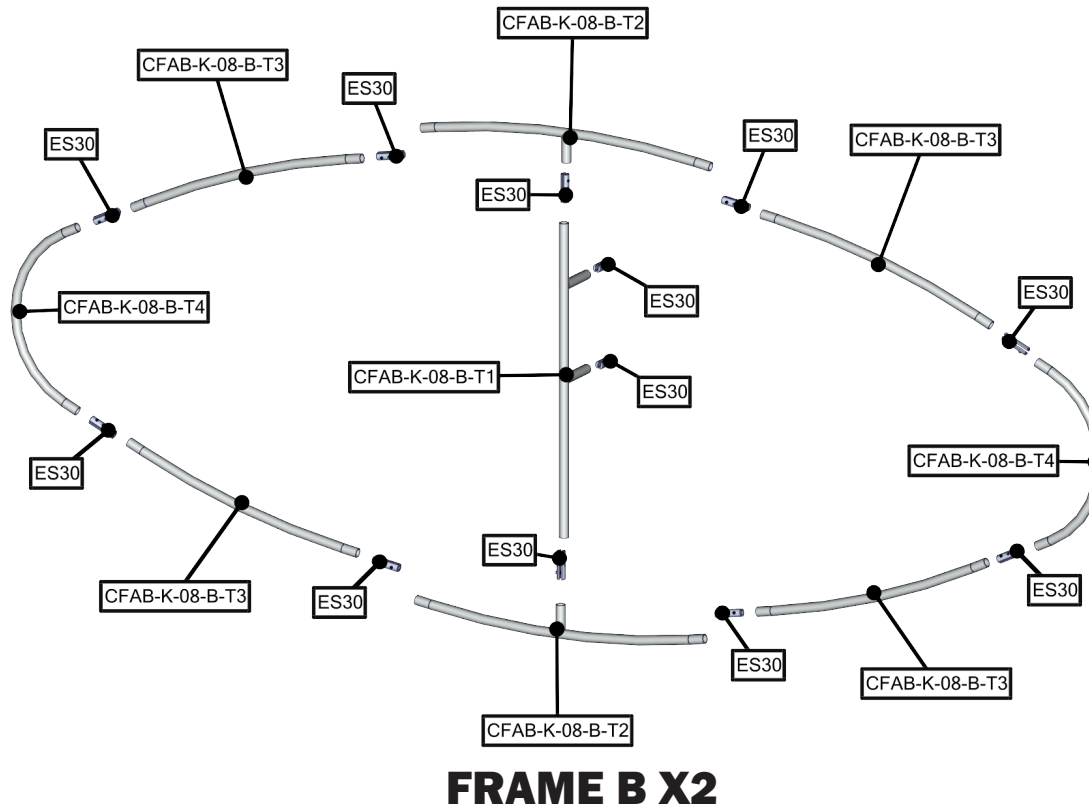


Labeling Diagram

CFAB-K-08

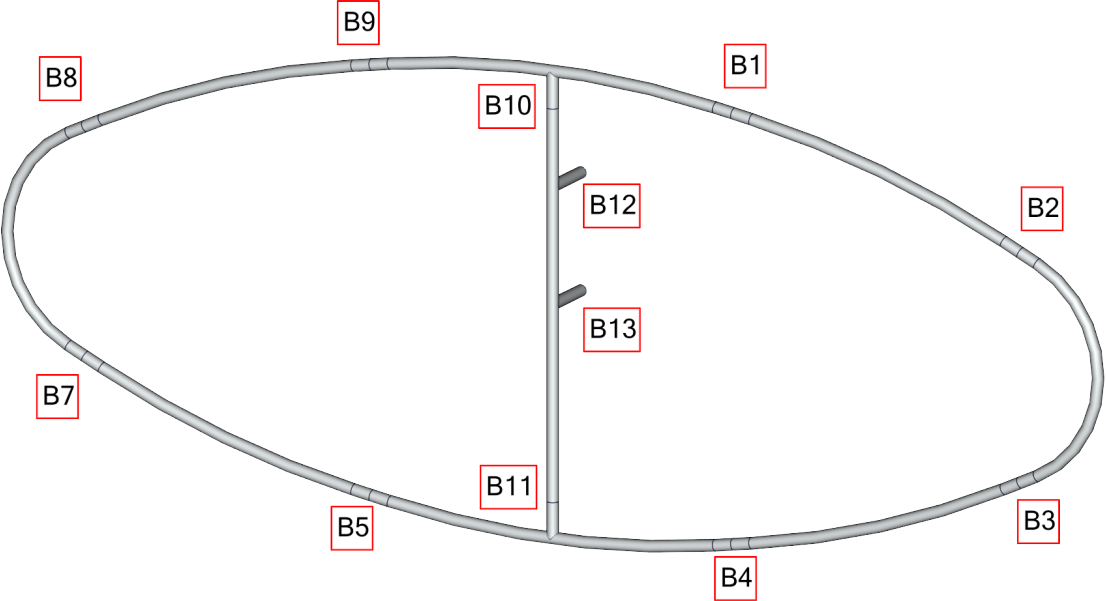


FRAME B X2

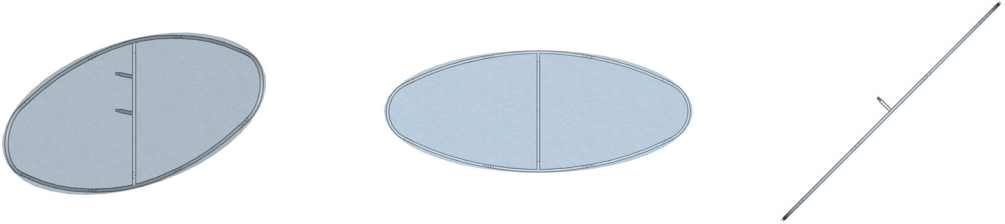

Exploded View


CFAB-K-08

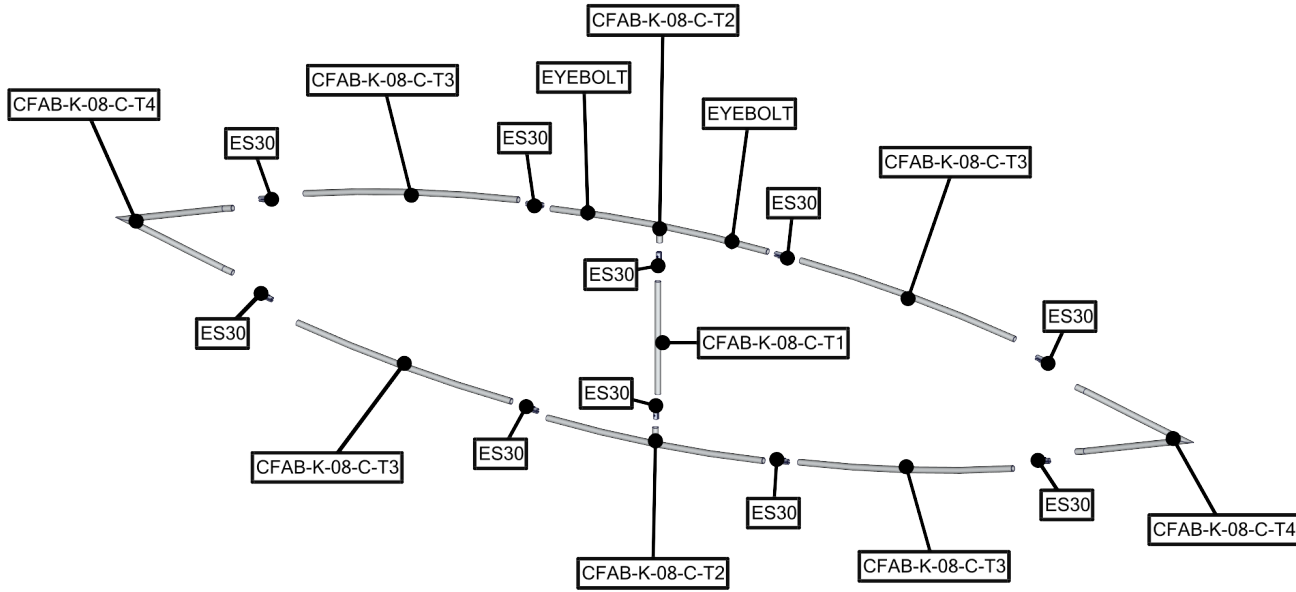


FRAME C

Labeling Diagram

CFAB-K-08

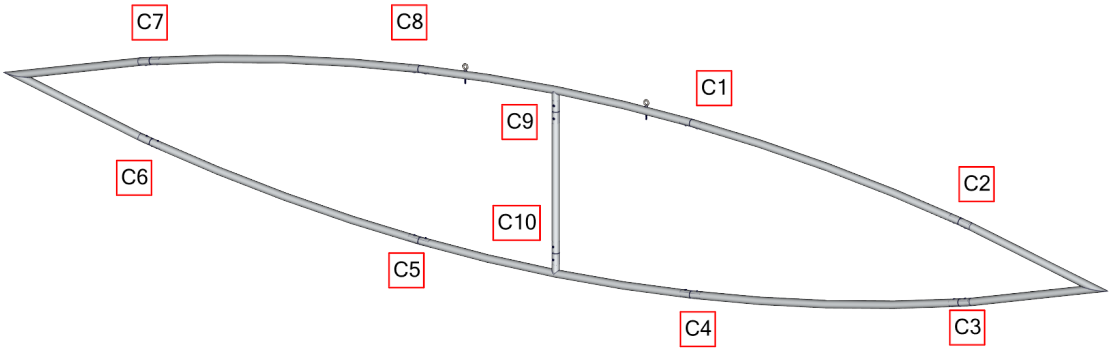


FRAME C

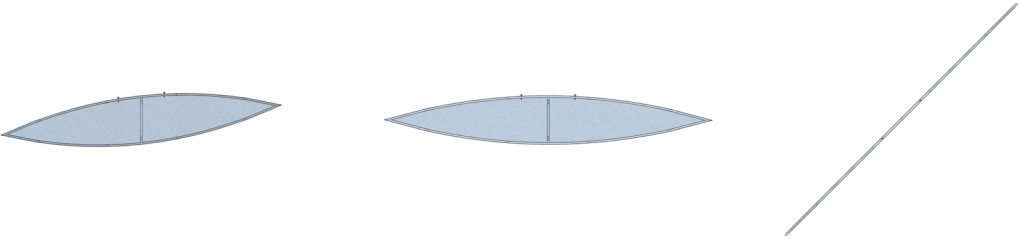

Exploded View

CFAB-K-08


FRAME D x2

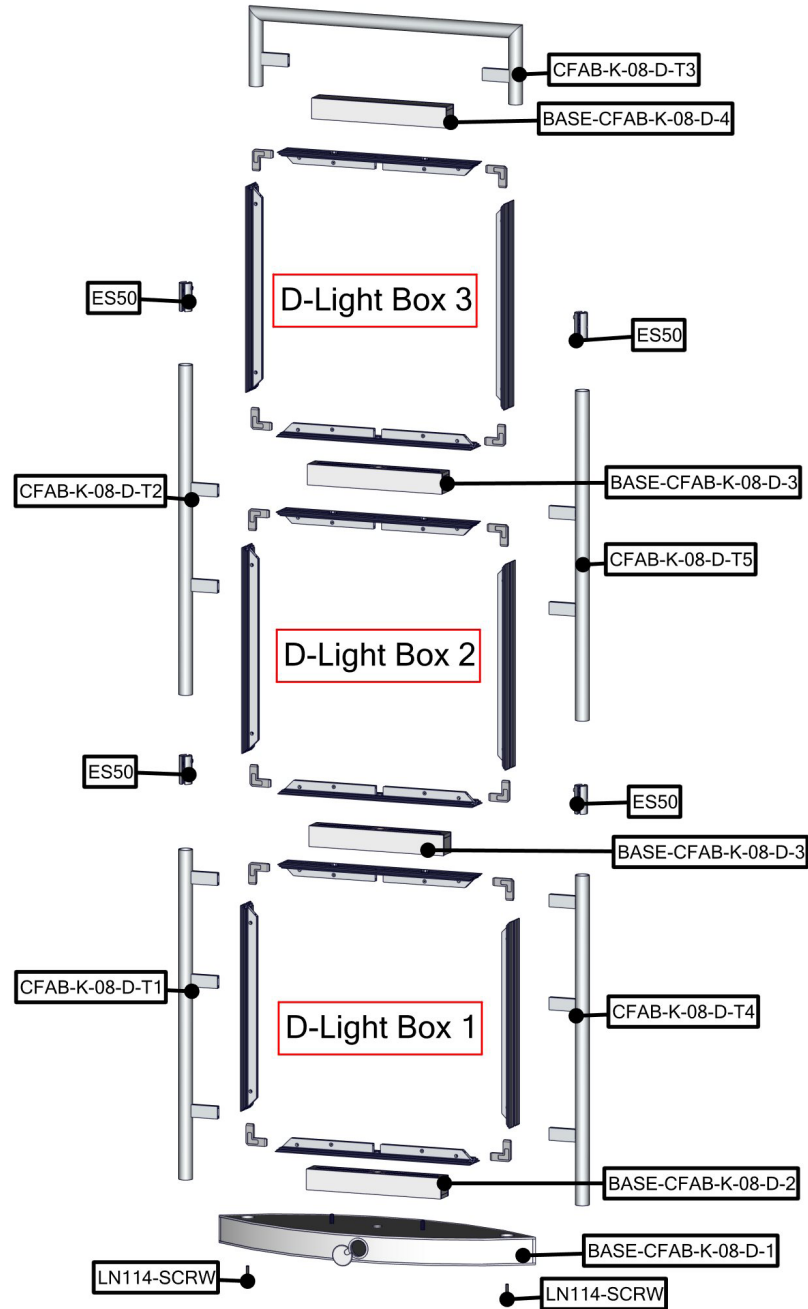

Exploded View

CFAB-K-08


FRAME D x2

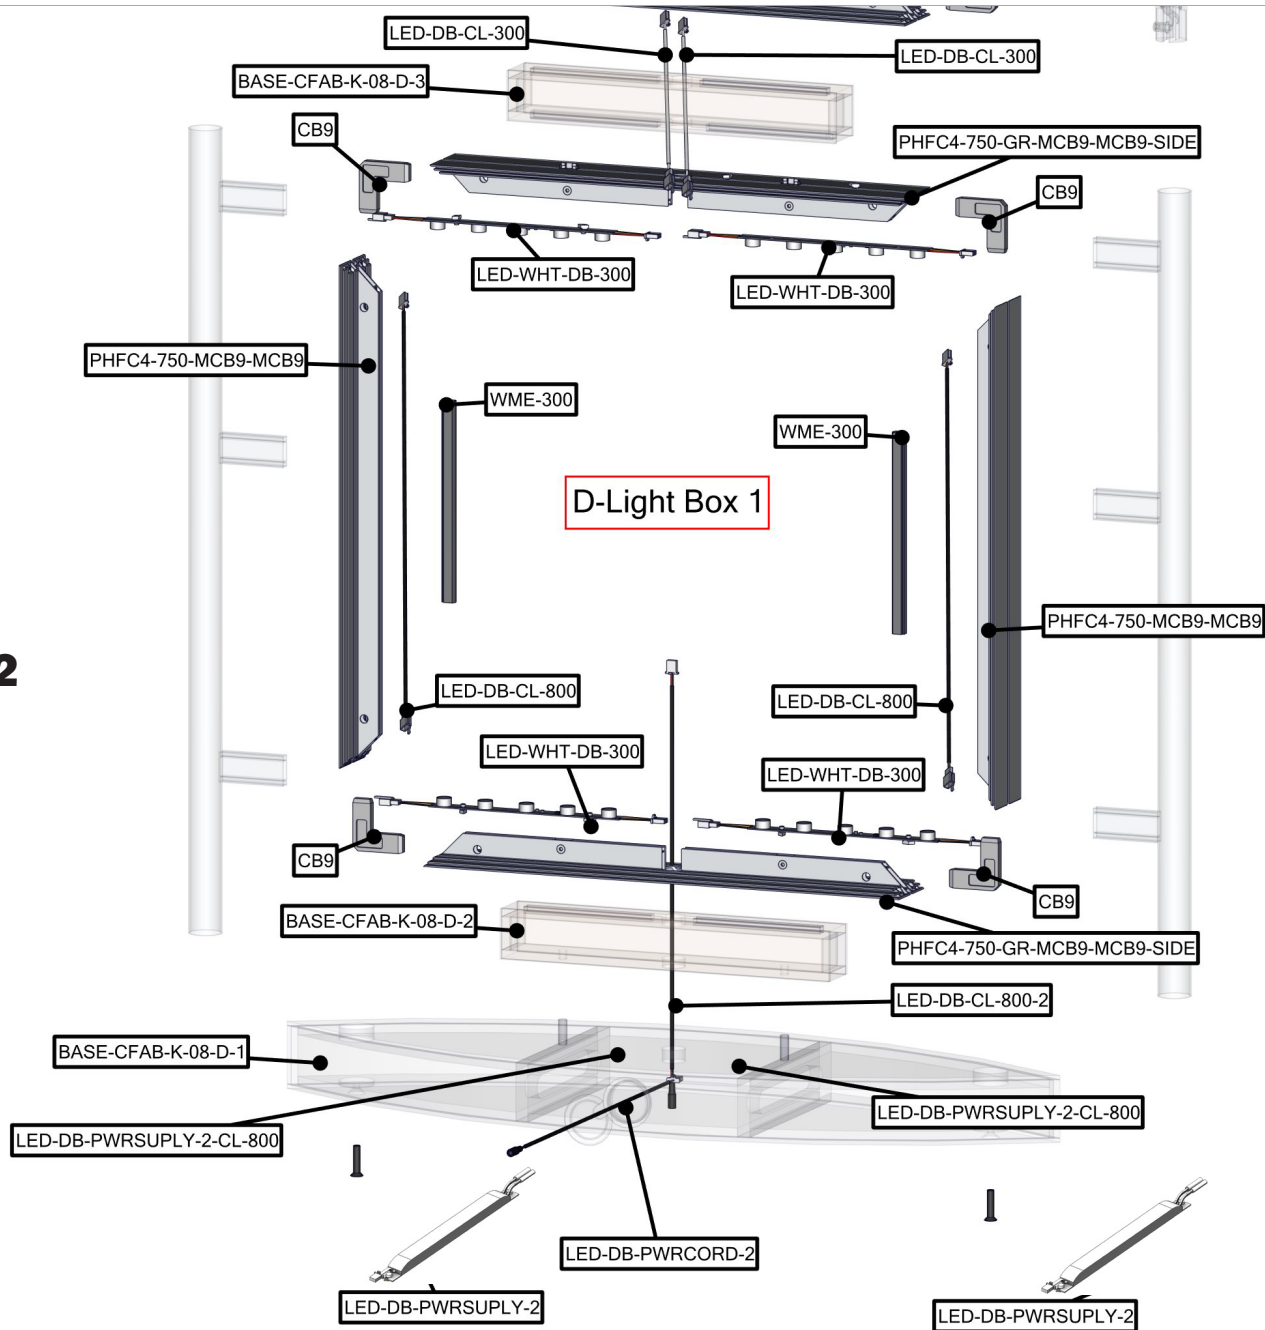

Exploded View

CFAB-K-08


FRAME D x2

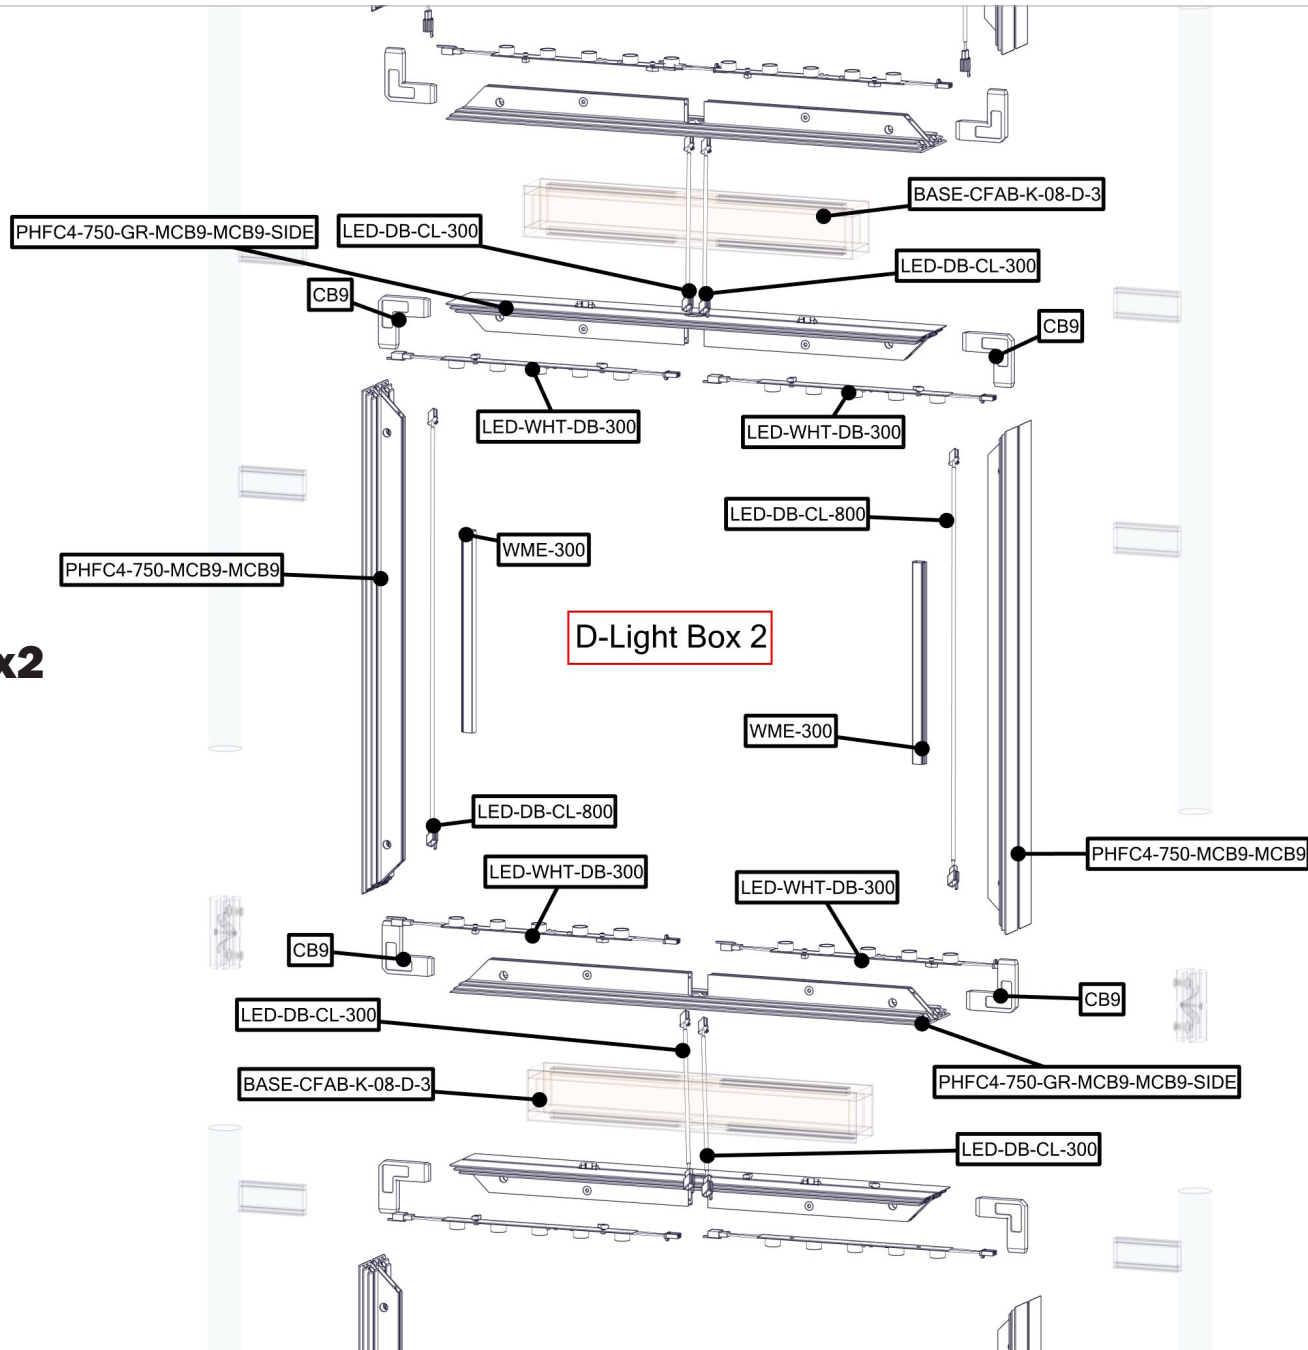

Exploded View

CFAB-K-08


FRAME D x2

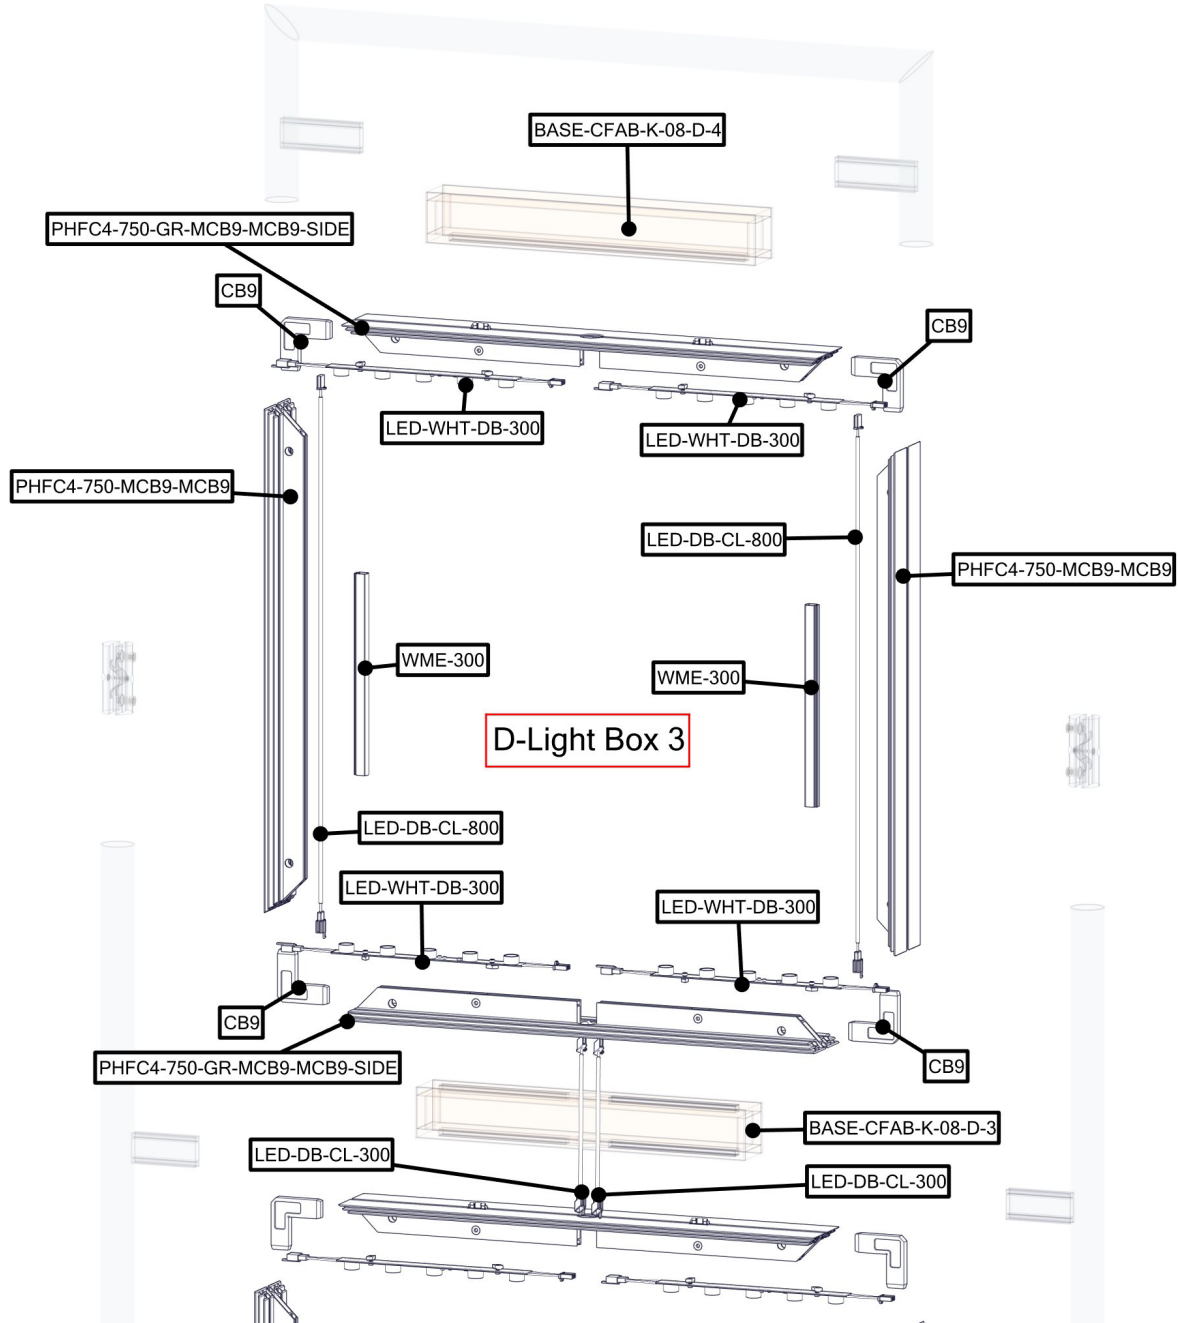

Internal Lighting Setup

CFAB-K-08





FRAME D x2

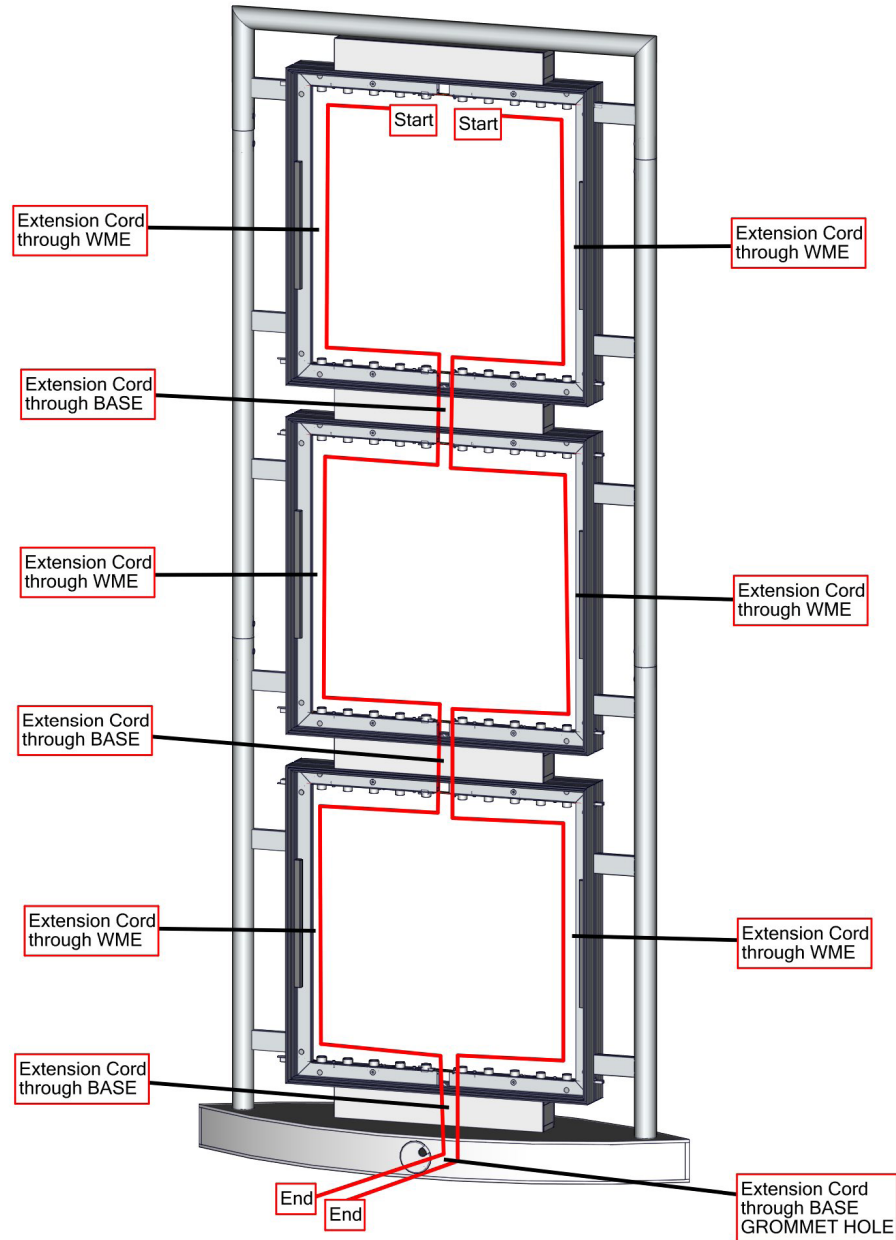

Labeling Diagram




CFAB-K-08

FRAME D x2

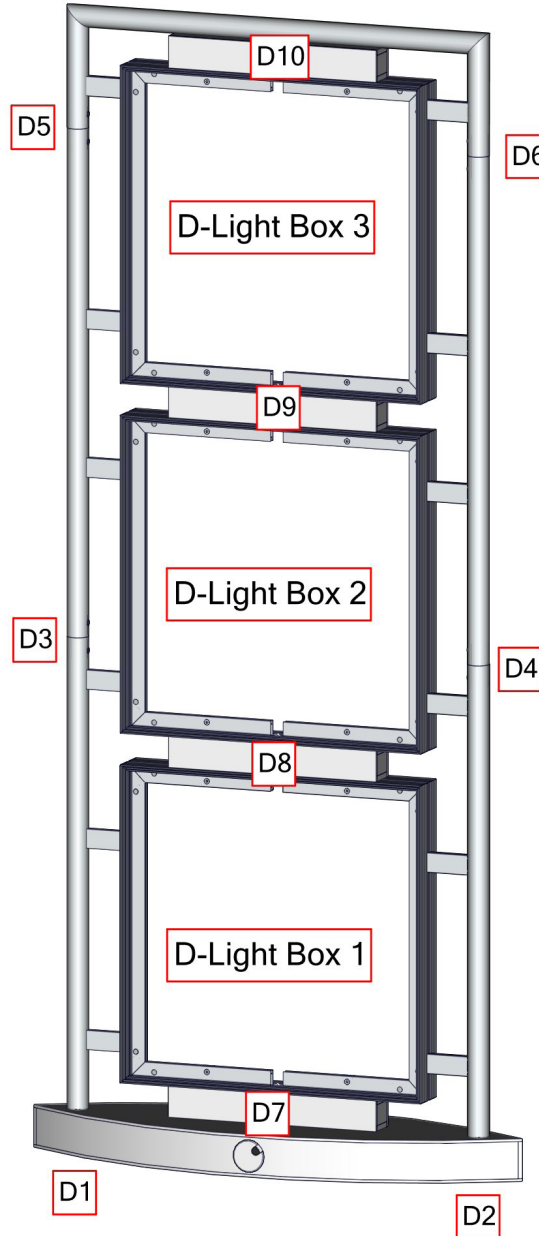

Suggested Kit Layout


CFAB-K-08

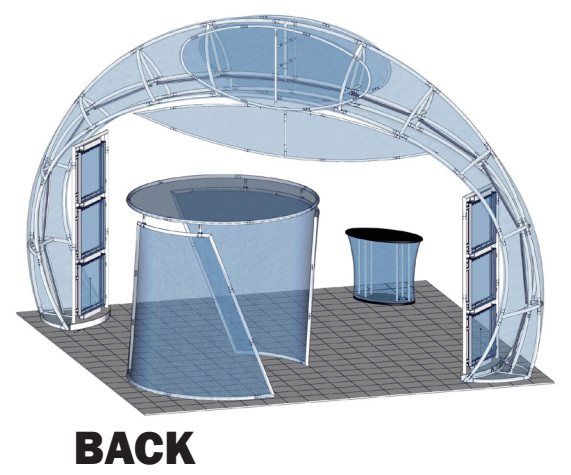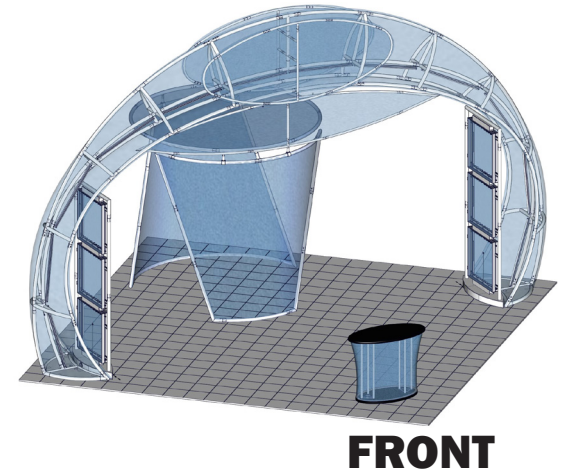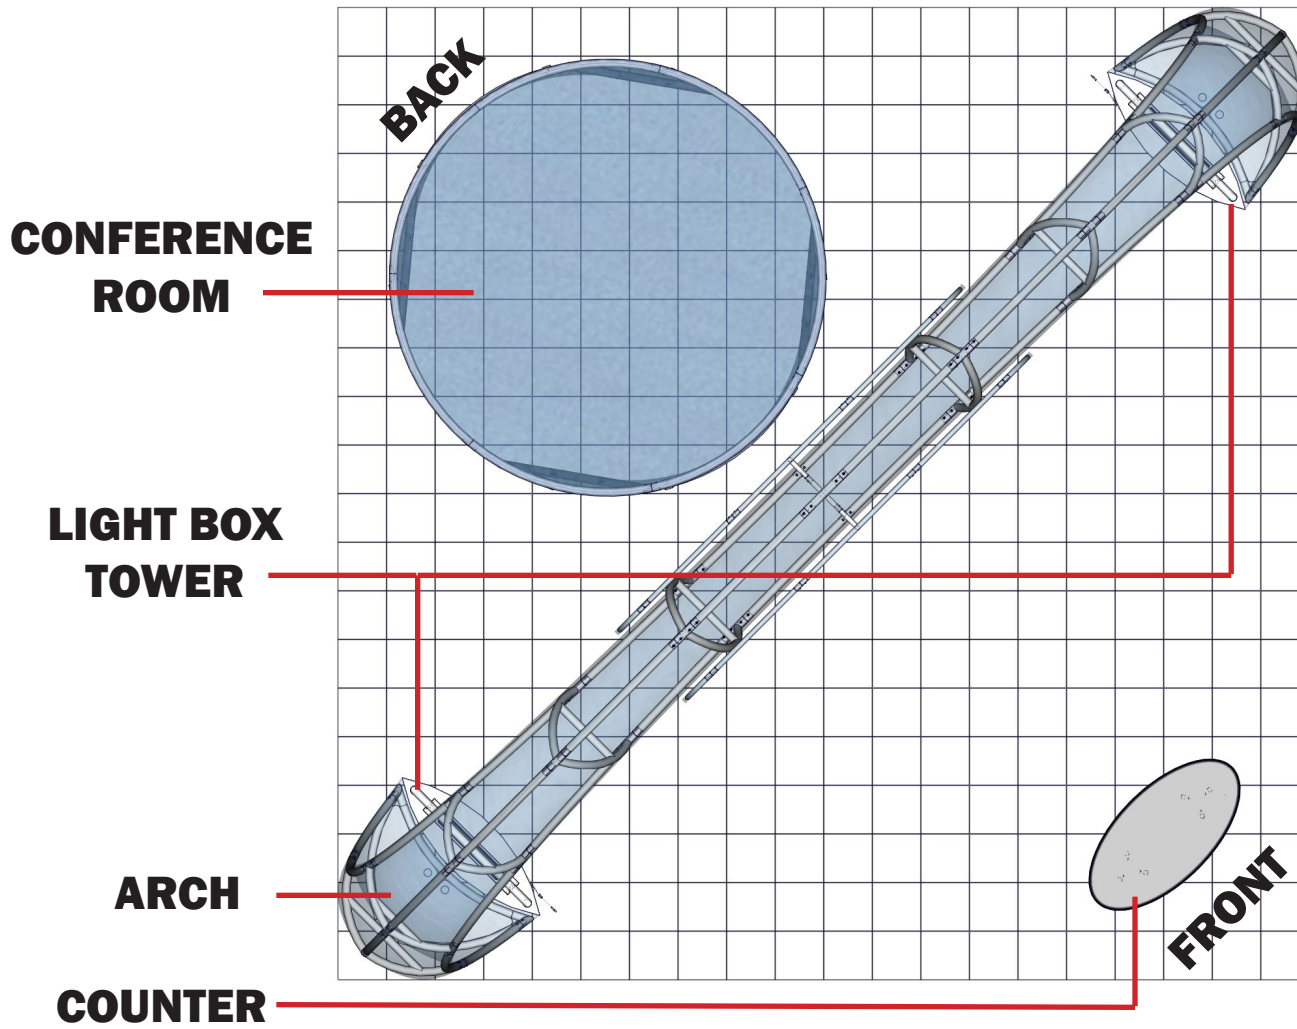

Connection Methods


Formulate® structures use a number of different yet simple connection methods. Your kit will include one or more of the connection methods shown below. Steps within the Kit Assembly will reference a specific method for each connection point.

Connection Method 1: ES30 / ES50 / ES75

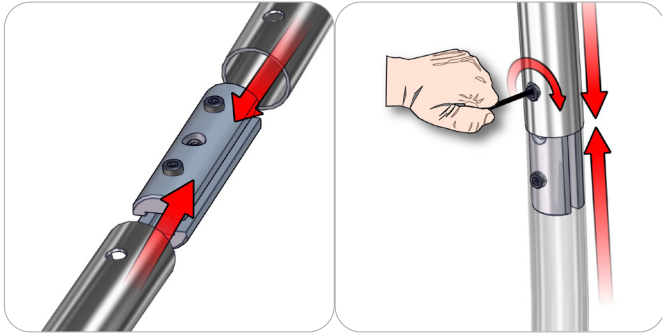


Compress the unlocked connector and slide one tube onto each end. Lock both screws carefully using your allen key tool. Be sure to lock securely, but do not overtighten.

Connection Method 2: Snap Buttons & Swage

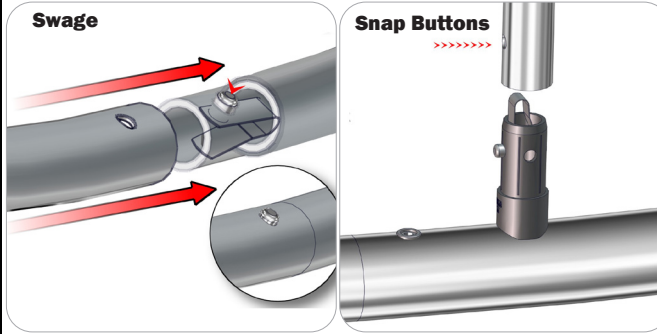

Locate the snap button on the connector or swage tube. Locate the hole on the corresponding tube. Press the snap button with your thumb and slide the tube and connector together so that the snap button snaps fully into the lock hole. To disassemble, press the snap button and pull apart.

Connection Method 3: ES30-90B / ES30-I / ES30-C

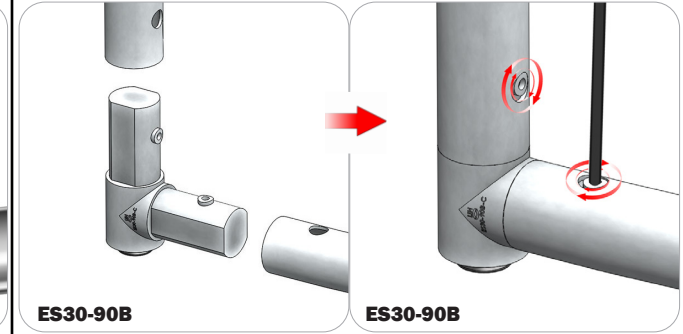


Compress one unlocked end of the connector and slide it through one tube end. Compress the other end of the connector and slide the second tube on. Lock both screws carefully using your allen key tool. Be sure to lock securely, but do not overtighten.

Connection Method 4: Tube Clamps



Be sure to fully assemble all frames before using clamps. With the clamp unlocked, place one tube of the first frame into the mouth of the clamp. Place the second tube (if applicable) into the second mouth of the clamp. With both frame's tubes in the clamp, be sure to lock securely, but do not overtighten.

Connection Method 5: Cam Lock / Slide Lock

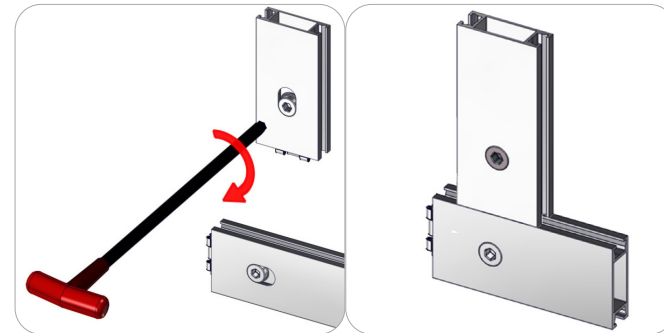

A cam lock equipped extrusion can lock to any cam lock channel. With the cam lock unlocked, set the teeth of the cam lock into the desired position on the cam lock channel. Using your allen key tool, carefully turn the lock clockwise to lock in place. Be sure to lock securely, but do not overtighten.


Kit Assembly

Step by Step

Step 1.



Gather the components to build Frame A. Assemble in the order as the Exploded Views and Labeling Diagram pages instructs.

Refer to Connection Method 1 for additional information.



Step 2.

Locate the large graphic panel CFAB-K-08-A-G-1 and the opaque diffuser panels for Frame A. With the diffuser panels on, zip-tie the internal lights onto Frame A in the order the Internal Lighting Setup page instructs. Finally, enclose the underside of the arch with the back-lit graphic panel CFAB-K-08-A-G-2.

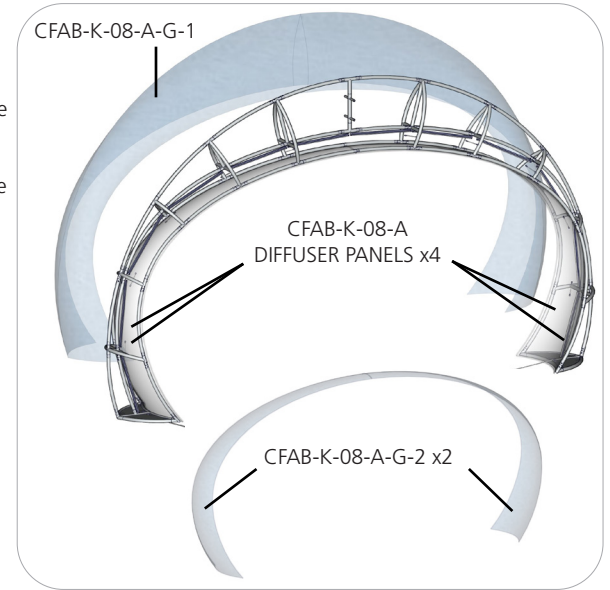


Step 3.

Gather the components to build Frame B. Assemble in the order the Exploded Views and Labeling Diagram pages instruct.

Refer to Connection Methods 1 and 2 for additional information.



Build 2 units.

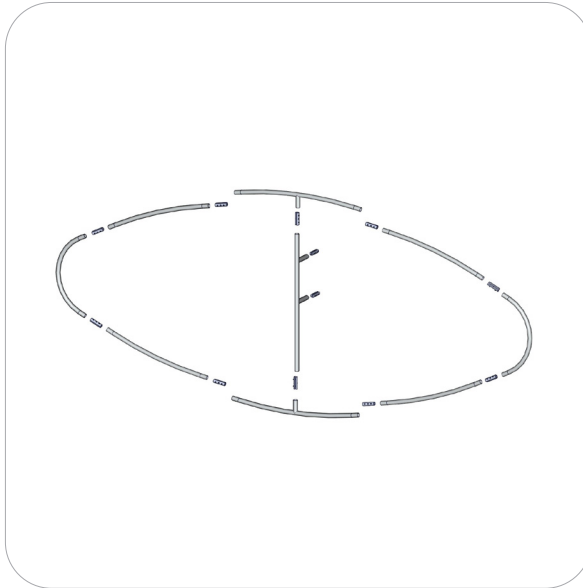

Step 4.

Locate the graphic pillowcase for Frame B. With the pillowcase unzipped, encase the frame from the bottom to the top. Zip the pillowcase fabric closed.

Build 2 units.

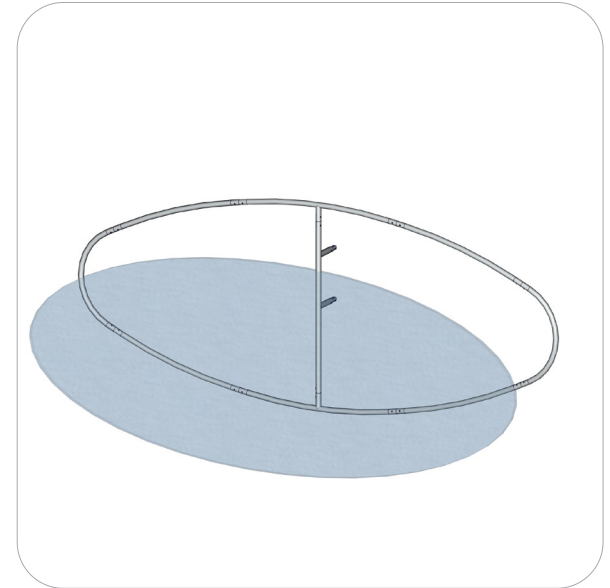


Kit Assembly

Step by Step

Step 5.


Gather the components to build Frame C. Assemble in the order as the Exploded Views and Labeling Diagram pages instruct.

Refer to Connection Methods 1 and 2 for additional information.

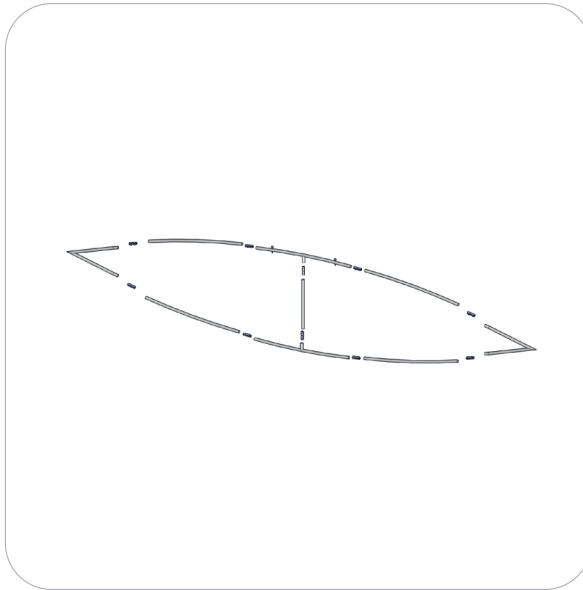

Step 6.

Locate the graphic pillowcase for Frame C. With the pillowcase unzipped, encase the frame from the bottom to the top. Zip the pillowcase fabric closed.


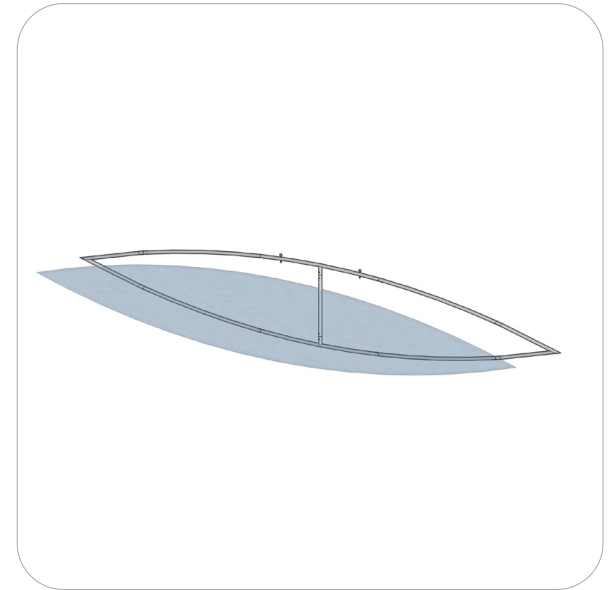


Step 7.

Gather the components to build Frame D. Assemble in the order the Exploded Views, Labeling Diagrams and Internal Lighting Setup pages instruct.

Build 2 units.



Refer to Connection Methods 1 and 5 for additional information.

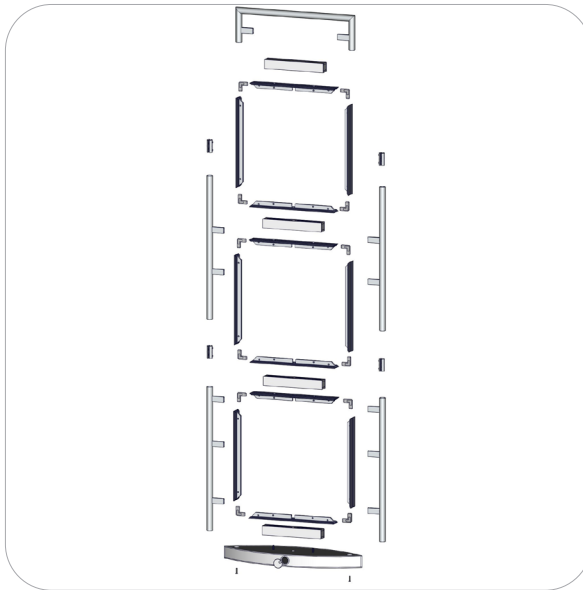

Step 8.

Locate the back-lit graphic panels for Frame D. With the frame assembled, push fit the back-lit panels into the front and back of the extrusion profile.

Build 2 units.

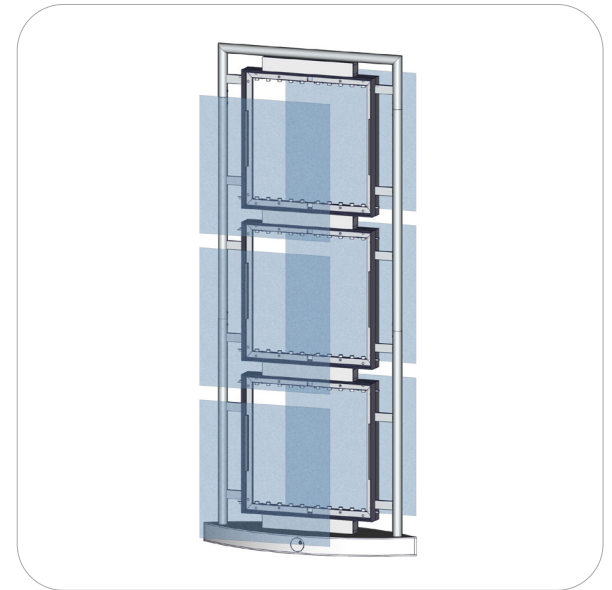


Kit Assembly

Step by Step

Step 9.



Locate the two pillow-cased Frame B assemblies and attach them onto the front and back arch of Frame A.

Refer to Connection Method 1 for additional information.

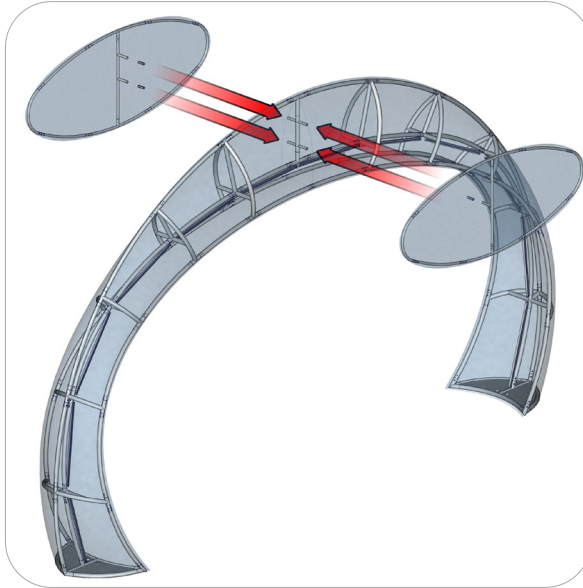


Step 10.

Locate the pillow-cased Frame C assembly and hang attach it onto the bottom arch of Frame A.

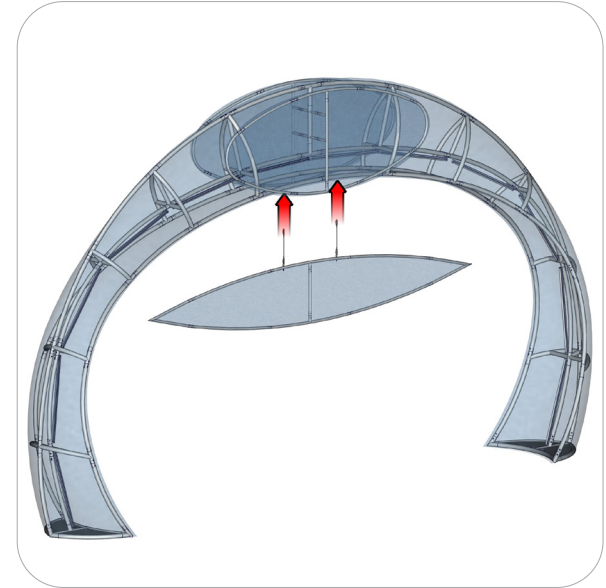

Step 11.


Locate the two Frame D assemblies and position them into the outside coves of Frame A.



Step 12.

Setup Complete.

Please reference your Conference Wall 02 and Oval Counter 05 setup instructions to complete your 20' x 20' booth space.



Kit Assembly

Step by Step

Step 13.

PDF on assembly follows this page for counter.



Step 14.

PDF on assembly follows this page for C-WALL-02.

